



Organisation intergouvernementale pour les transports internationaux ferroviaires

Zwischenstaatliche Organisation für den internationalen Eisenbahnverkehr


Intergovernmental Organisation for International Carriage by Rail

Uniform Technical Prescription

Subsystem Infrastructure


UTP INF

Applicable from [Click here to enter a date.](#)

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 2 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

Amendments record

Reference	Date	Description and comments
TECH-18025 Version 1	20.8.2018	First draft for review by WG TECH 35.
TECH-18025 Version 2	24.10.2018	<p>Draft for review by WG TECH 36. Modifications include:</p> <ul style="list-style-type: none"> • Legal form modified from non-binding to binding on particular lines as decided by states • Specification at two levels: binding and recommended • Added guiding principles to assist states in deciding which lines to be subject to the UTP • Recommended procedure for dealing with deviations from the prescriptions <p>Modifications in track changes compared to version 1</p>
TECH-18025 Version 3	7.1.2019	<p>Draft for review by WG TECH 37. Modifications include:</p> <ul style="list-style-type: none"> • Technical scope clarified by defining the track gauges to which the requirements apply. Chapter 1.1. • States to ensure procedures for route compatibility checks are in place. Chapter 4.4. • States to publish a list of lines on which the UTP is applicable. Chapter 7. <p>Modifications in track changes compared to version 2</p>
TECH-20021 Version 1	19.5.2020	<p>A new reference number: TECH-20021, instead of TECH-18025.</p> <p>Draft for review by WG TECH 40.</p> <p>Modifications following discussion at WG TECH 37 (not in track changes).</p> <p>Amendments to align with Commission Implementing Regulation (EU) 2019/776 of 16 May 2019 and further editorial and substantial modifications (in track changes).</p>

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 3 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

APTU Uniform Rules (Appendix F to COTIF 1999)

Uniform Technical Prescriptions (UTP) Infrastructure

UTP Infrastructure

These regulations have been developed in accordance with Article 8 of the APTU UR (Appendix F), in the version as amended by the OTIF Revision Committee in 2009, 2014 and 2018, which entered into force on 1 March 2019. For definitions and terms, see also Article 2 of the ATMF UR (Appendix G) and Article 2 of the APTU UR (Appendix F) in force since 1 March 2019. Footnotes [are not legal provisions, they](#) include both explanatory information ~~(which is not part of the regulations)~~, and references to other regulations.

0. PURPOSE AND EQUIVALENCE

- (1) Following their adoption by the Committee of Technical Experts, the OTIF ~~regulations~~ [provisions](#) included in this document are declared equivalent to the corresponding EU regulations within the meaning of Article 13 § 4 letter b) of APTU, in particular:


- Commission Regulation (EU) No 1299/2014 of 18 November 2014 on the technical specification for interoperability relating to the “infrastructure” subsystem of the rail system in the European Union¹, hereinafter referred to as the INF TSI, [as last amended by Commission Implementing Regulation \(EU\) 2019/776 of 16 May 2019²](#).

The equivalence is limited to the technical provisions (chapters 4 and 5) and the particular assessment procedures (chapter 6.2.4).

In accordance with Article 8 § 2 of ATMF, admission of infrastructure and supervision of its maintenance remain subject to the provisions in force in the Contracting State in which the infrastructure is located. The specifications in this UTP which are concerned by this Article of ATMF are therefore non-binding but recommended.

¹ Official Journal of the EU: OJ L 356, 12.12.2014, p. 1–109

² [Official Journal of the EU: OJ L 139, 27.5.2019, p. 108–311](#)

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 4 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

Where provisions in this UTP and the INF TSI differ in substance, the respective texts are in a 2-column format. The left-hand column and the full width texts show the UTP provisions (OTIF regulations) and the right-hand column shows the European Union TSI text. The right-hand column is for information only.

Where differences between texts of this UTP and the European Union INF TSI are editorial, or not substantive, the INF TSI texts are not reproduced, e.g. in cases where the TSI would refer to a TSI, this UTP refers to the corresponding UTP instead.

The purpose of this UTP is to promote compatibility between neighbouring lines and networks, without compromising coherence between the international lines and the domestic network.

In order not to hinder states in ensuring such coherence, states may decide on a line-by-line basis whether or not to not apply this UTP.

Infrastructure in the context of this UTP only covers parameters that are relevant in terms of technical compatibility with vehicles, so it does not therefore constitute an exhaustive design specification.


‘Infrastructure’ is one of the three fixed installation subsystems defined in UTP GEN-B: the other subsystems are the energy subsystem and the trackside control-command and signalling subsystem. This document concerns the *subsystem infrastructure* only.

The objectives and scope of COTIF and the EU law concerning railways are not identical and it has therefore been necessary to use different terminology for concepts that have a similar but not identical meaning. The following table lists the terms used in this UTP and the corresponding terms used in the TSI concerning infrastructure:

This UTP	INF TSI
admission	authorisation
The declaration of conformity	The EC declaration of conformity

⁽³⁾

³ Article 2 paragraphs 5 and 6 of Commission Regulation (EU) No 1299/2014 of 18 November 2014, enacting part of the INF TSI

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 5 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

Type examination	EC type examination
UTP verification procedure	EC verification
UTP declaration of verification	EC declaration of verification
UTP Certificate of verification	EC Certificate of verification
Contracting State	Member State
Assessing Entity	Notified Body

1. INTRODUCTION

1.1. Technical scope

This UTP concerns the infrastructure subsystem in accordance with UTP GEN-B⁴.

This UTP sets out the railway infrastructure parameters that are relevant in terms of compatibility with vehicles and specific methods to check these parameters.

This UTP contains provisions concerning the following nominal track gauges: 1 435 mm, 1 520 mm, 1 524 mm, 1 600 mm and 1 668 mm.

Metric gauge is excluded from the technical scope.

This TSI concerns the infrastructure subsystem and part of the maintenance subsystem of the Union rail system in accordance with Article 1 of Directive [\(EU\) 2016/797](#)~~2008/57/EC~~^{5,6}.

The infrastructure and the maintenance subsystems ~~is-are~~ defined respectively in points 2.1 and 2.8 of Annex II ~~(2.1)~~ to Directive [\(EU\) 2016/797](#)~~2008/57/EC~~.

The technical scope of this TSI is further defined in Article 2(1), 2(5) and 2(6) of this Regulation⁷

1.2. Geographical scope

Contracting States on whose territory a line is located shall, for their territory, decide whether this UTP is applicable to that line.

The geographical scope of this TSI is defined in Article 2(4) of this Regulation⁸.


⁴ Throughout this document, UTP GEN-B means: Uniform Technical Prescriptions – General Provisions, Subsystems, in the version that entered into force on 1.12.2017

⁵ ~~Directive 2008/57/EC of the European Parliament and of the Council of 17 June 2008 on the interoperability of the rail system within the Community, as last amended by Commission Directive 2014/106/EU of 5 December 2014, hereinafter referred to as Directive 2008/57/EC~~

⁶ [Directive \(EU\) 2016/797 of the European Parliament and of the Council of 11 May 2016 on the interoperability of the rail system within the European Union \(OJ L 138, 26.5.2016, p. 44\)](#), hereinafter referred to as Directive (EU) 2016/797

⁷ Commission Regulation (EU) No 1299/2014 of 18 November 2014, enacting part of the INF TSI, [as last amended by Commission Implementing Regulation \(EU\) 2019/776 of 16 May 2019](#)

⁸ Commission Regulation (EU) No 1299/2014 of 18 November 2014, enacting part of the INF TSI, [as last amended by Commission Implementing Regulation \(EU\) 2019/776 of 16 May 2019](#):

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 6 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

Contracting States are recommended to apply this UTP on all new lines which will be open for international traffic and on existing lines which are substantially used for international traffic, as required in 7.3 in cases of upgrade, renewal, or substitution in the framework of maintenance.

Neighbouring Contracting States are recommended to coordinate the application of this UTP where relevant.

1.3. Content of this UTP


- (2) The substance of this UTP is developed in accordance with Article 8 § 4 letters a) to ~~g~~i) and Article 8 § 6 of the APTU UR.

In accordance with Article ~~5~~4(3) of Directive ~~(EU) 2016/797~~~~2008/57/EC~~, this TSI:

- (a) indicates its intended scope (section 2);
- (b) lays down essential requirements for the infrastructure and part of the maintenance subsystems (section 3);
- (c) establishes the functional and technical specifications to be met by the infrastructure and part of the maintenance subsystems and its interfaces vis-à-vis other subsystems (section 4);
- (d) specifies the interoperability constituents and interfaces which must be covered by European specifications, including European standards, which are necessary to achieve interoperability within the Union rail system (section 5);
- (e) states, in each case under consideration, which procedures are to be used in order to assess the conformity or the suitability for use of the interoperability constituents, on the one hand, or the EC verification of the subsystems, on the other hand (section 6);
- (f) indicates the strategy for implementing this TSI (section 7);
- (g) indicates, for the staff concerned, the professional qualifications and health and safety conditions at work required for the operation and maintenance of the infrastructure

"The TSI shall apply to the ~~following~~ network of the Union rail system as described in Annex I of Directive (EU) 2016/797 with the exclusion of cases referred to in Article 1 (3) and (4) of Directive (EU) 2016/797:

- (a) the trans-European conventional rail system network as defined in Annex I, point 1.1 to Directive 2008/57/EC;*
- (b) the trans-European high-speed rail system network (TEN) as defined in Annex I, point 2.1 to Directive 2008/57/EC;*
- (c) other parts of the network of the rail system in the Union; and excludes the cases referred to in Article 1(3) of Directive 2008/57/EC."*

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 7 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

subsystem, as well as for the implementation of this TSI (section 4).

(h) indicates the provisions applicable to the existing infrastructure subsystem, in particular in the event of upgrading and renewal and, in such cases, the modification work which requires an application for a new authorisation;

(i) indicates the parameters of infrastructure subsystem to be checked by the railway undertaking and the procedures to be applied to check those parameters after the delivery of the vehicle authorisation for placing on the market and before the first use of the vehicle to ensure compatibility between vehicles and the routes on which they are to be operated.

In accordance with Article ~~4~~5(5) of the Directive (EU) 2016/797~~2008/57/EC~~, provisions for specific cases are indicated in section 7.

- (3) Requirements in this UTP are valid for all track gauge systems within the scope of this UTP, unless a paragraph refers to specific track gauge systems or to specific nominal track gauges.

2. DEFINITION AND SCOPE OF SUBSYSTEM

2.1. Definition of the infrastructure subsystem

This UTP covers:

- a) the infrastructure structural subsystem
- b) facilities for servicing trains

b) the part of the maintenance functional subsystem relating to the infrastructure subsystem

(that is: washing plants for external cleaning of trains, water restocking, refuelling, fixed installations for toilet discharge and electrical shore supplies).

The elements of the infrastructure subsystem are described in


UTP GEN-B (2.1. Infrastructure).

Point 2.1 of Annex II (~~2.1. Infrastructure~~) to Directive (EU) 2016/797~~2008/57/EC~~.

The elements of the maintenance subsystem are described in point 2.8 of Annex II to Directive (EU) 2016/797.

The scope of this UTP therefore includes the following aspects of the infrastructure subsystem:

- a) Line layout,

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 8 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

- b) Track parameters,
- c) Switches and crossings,
- d) Track resistance to applied loads,
- e) Structures resistance to traffic loads,
- f) Immediate action limits on track geometry defects,
- g) Platforms,
- h) Health, safety and environment,
- i) Provision for operation,
- j) Fixed installations for servicing trains.

But only to the extent that interfaces with vehicles are concerned.

Further details are set out in point 4.2.2 of this UTP.

2.2. Interfaces of this UTP with other UTPs

Point 4.3 of this UTP sets out the functional and technical specification of the interfaces with the other subsystems.

Point 4.3 of this TSI sets out the functional and technical specification of the interfaces with the following subsystems, as defined in the relevant TSIs:

- a) Rolling stock subsystem,
- b) Energy subsystem,
- c) Control command and signalling subsystem,
- d) Traffic operation and management subsystem.

Interfaces with the UTP concerning accessibility for Persons with Reduced Mobility (UTP PRM) are described in point 2.3 below.

Interfaces with the Safety in Railway Tunnels are described in point 2.4 below.

2.3. Interfaces with the UTP concerning accessibility for persons with reduced mobility


The applicable recommended practices for infrastructure requirements related to accessibility for persons with reduced mobility are set out in the UTP PRM.

All requirements relating to the infrastructure subsystem for the access of persons with reduced mobility to the railway system are set out in the Persons with Reduced Mobility TSI.

2.4. Interfaces with safety in railway tunnels

Contracting States shall ensure that railway tunnels used for international transport are sufficiently safe for use by vehicles which are admitted to international traffic. States shall apply

All requirements relating to the infrastructure subsystem for safety in railway tunnels are set out in the Safety in Railway Tunnels TSI.

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 9 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

the Uniform Technical Prescriptions for this purpose, where they exist.

2.5. Relation to the safety management system

Contracting States shall ensure that the entity which manages infrastructure in the scope of this UTP has implemented processes which ensure continued compliance with this UTP, including operational and technical interfaces.

If so required by applicable law in the state concerned, compliance shall be ensured by means of a safety management system.

Necessary processes to manage safety according to the requirements in the scope of this TSI, including interfaces to humans, organisations or other technical systems, shall be designed and implemented in the infrastructure manager's safety management system as required by Directive [2004/49/EC](#)⁹ [\(EU\) 2016/798](#)¹⁰.

3. ESSENTIAL REQUIREMENTS

The following table indicates basic parameters of this UTP and their correspondence to the essential requirements as set out and numbered in

UTP GEN-A 2017¹¹.

Annex III to Directive [\(EU\) 2016/797](#)^{2008/57/EC}.

Table 1 Basic Parameters of the infrastructure subsystem corresponding to the essential requirements

UTP point	Title of UTP point	Safety	Reliability Availability	Health	Environmental protection	Technical compatibility	Accessibility
4.2.3.1	Structure gauge	1.1.1, 2.1.1				1.5	
4.2.3.2	Distance between track centres	1.1.1, 2.1.1				1.5	
4.2.3.3	Maximum gradients	1.1.1				1.5	
4.2.3.4	Minimum radius of horizontal curve	1.1.3				1.5	
4.2.3.5	Minimum radius of vertical curve	1.1.3				1.5	
4.2.4.1	Nominal track gauge					1.5	
4.2.4.2	Cant	1.1.1, 2.1.1				1.5	1.6.1
4.2.4.3	Cant deficiency	1.1.1				1.5	

⁹ Directive 2004/49/EC of the European Parliament and of the Council of 29 April 2004 on safety on the Community's railways and amending Council Directive 95/18/EC on the licensing of railway undertakings and Directive 2001/14/EC on the allocation of railway infrastructure capacity and the levying of charges for the use of railway infrastructure and safety certification, hereinafter referred to as Directive 2004/49/EC

¹⁰ Directive (EU) 2016/798 of the European Parliament and of the Council of 11 May 2016 on railway safety (OJ L 138, 26.5.2016, p. 102)

¹¹ Throughout this prescription, UTP GEN-A 2017 means: Uniform Technical Prescriptions – General Provisions, Essential requirements, in the version that entered into force on 1.12.2017.



Status: **DRAFT**

Version 1

Ref.: TECH-20021

Original: EN

Date: 19.05.2020

4.2.4.4	Abrupt change of cant deficiency	2.1.1					
4.2.4.5	Equivalent conicity	1.1.1, 1.1.2				1.5	
4.2.4.6	Railhead profile for plain line	1.1.1, 1.1.2				1.5	
4.2.4.7	Rail inclination	1.1.1, 1.1.2				1.5	
4.2.5.1	Design geometry of switches and crossings	1.1.1, 1.1.2, 1.1.3				1.5	
4.2.5.2	Use of swing nose crossings	1.1.2, 1.1.3				1.5	
4.2.5.3	Maximum unguided length of fixed obtuse crossings	1.1.1, 1.1.2				1.5	
4.2.6.1	Track resistance to vertical loads	1.1.1, 1.1.2, 1.1.3				1.5	
4.2.6.2	Longitudinal track resistance	1.1.1, 1.1.2, 1.1.3				1.5	
4.2.6.3	Lateral track resistance	1.1.1, 1.1.2, 1.1.3				1.5	
4.2.7.1	Resistance of new bridges to traffic loads	1.1.1, 1.1.3				1.5	
4.2.7.2	Equivalent vertical loading for new earthworks and earth pressure effects imposed on new structures	1.1.1, 1.1.3				1.5	
4.2.7.3	Resistance of new structures over or adjacent to tracks	1.1.1, 1.1.3				1.5	
4.2.7.4	Resistance of existing bridges and earthworks to traffic loads	1.1.1, 1.1.3				1.5	
4.2.8.1	The immediate action limit for alignment	1.1.1, 1.1.2	1.2				
4.2.8.2	The immediate action limit for longitudinal level	1.1.1, 1.1.2	1.2				
4.2.8.3	The immediate action limit for track twist	1.1.1, 1.1.2	1.2				
4.2.8.4	The immediate action limit of	1.1.1, 1.1.2	1.2				



Status: **DRAFT**


Version 1

Ref.: TECH-20021

Original: EN

Date: 19.05.2020

	track gauge as isolated defect						
4.2.8.5	The immediate action limit for cant	1.1.1, 1.1.2	1.2				
4.2.8.6	The immediate action limit for switches and crossings	1.1.1, 1.1.2	1.2			1.5	
4.2.9.1	Usable length of platforms	1.1.1, 2.1.1				1.5	
4.2.9.2	Platform height	1.1.1, 2.1.1				1.5	1.6.1
4.2.9.3	Platform offset	1.1.1, 2.1.1				1.5	1.6.1
4.2.9.4	Track layout alongside platforms	1.1.1, 2.1.1				1.5	1.6.1
4.2.10.1	Maximum pressure variations in tunnels	1.1.1, 2.1.1				1.5	
4.2.10.2	Effect of cross winds	1.1.1, 2.1.1	1.2			1.5	
4.2.10.3	Aerodynamic effect on ballasted track Ballast pick-up	1.1.1	1.2			1.5	
4.2.11.1	Location markers	1.1.1	1.2			1.5	
4.2.11.2	Equivalent conicity in service	1.1.1, 1.1.2				1.5	
4.2.12.2	Toilet discharge	1.1.5	1.2	1.3.1		1.5	
4.2.12.3	Train external cleaning facilities		1.2			1.5	
4.2.12.4	Water restocking	1.1.5	1.2	1.3.1		1.5	
4.2.12.5	Refuelling	1.1.5	1.2	1.3.1		1.5	
4.2.12.6	Electric shore supply	1.1.5	1.2			1.5	
4.4	Operating rules		1.2				
4.5	Maintenance rules		1.2				
4.6	Professional qualifications	1.1.5	1.2				
4.7	Health and safety conditions	1.1.5	1.2	1.3	1.4.1		

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 12 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

4. DESCRIPTION OF THE INFRASTRUCTURE SUBSYSTEM

4.1. Introduction

(1) The

consistency between the different subsystems as defined in UTP GEN-B

Union rail system, to which Directive [\(EU\) 2016/797](#)~~2008/57/EC~~ applies and of which the infrastructure and maintenance subsystems are parts, is an integrated system whose consistency

needs to be verified. This consistency must be checked in particular with regard to the specifications of the infrastructure subsystem, its interfaces

with the other subsystems.

In relation to the other subsystems of the Union rail system in which it is integrated, as well as the operating and maintenance rules.

(2) The limiting values set out in this UTP are not intended to be imposed as usual design values. However the design values must be within the limits set out in this UTP.

(3) The functional and technical specifications of the [infrastructure and part of the maintenance](#) subsystems and ~~its~~ [their](#) interfaces, [as](#) described in points 4.2 and 4.3, do not impose the use of specific technologies or technical solutions, except where this is strictly necessary for

international traffic.

the interoperability of the Union rail system.

(4) Innovative solutions for interoperability which do not fulfil the requirements specified in this UTP and/or which are not assessable as stated in this UTP require new specifications and/or new assessment methods. In order to allow technological innovation, these specifications and assessment methods shall be developed by the process for innovative solutions described in

6.1.3 of this UTP.

Article 10.

(5) Where reference is made to EN standards, any variations called ‘national deviations’ in the EN do not apply, unless otherwise specified in this UTP.

(6) Where line speeds are stated in (km/h) as a category or performance parameter in this UTP, it shall be allowed to translate the speed to equivalent (mph)

in states where this is the commonly used unit of speed.

As in Appendix G, for Ireland and for the United Kingdom of Great Britain and Northern Ireland networks.

4.2. Functional and technical specifications of [the infrastructure](#) subsystem

4.2.1. UTP categories of Line

(1) In order to deliver interoperability cost-effectively this UTP defines performance levels for line categories.

(1) [The elements of the Union's rail network are set out in point 1 of Annex I to Directive \(EU\) 2016/797](#)~~Annex I to Directive 2008/57/EC~~ recognises that the Union rail network may be



- (2) Lines shall be categorised in accordance with performance levels defined in this UTP. It

~~subdivided into different categories for the Trans European conventional rail network (point 1.1), the Trans European high speed rail network (point 2.1) and the extension of the scope (point 4.1). In order to deliver interoperability cost-effectively, each element of the Union's rail network shall be assigned a this TSI defines performance levels for "TSI categories of line".~~

~~(2) The TSI category of line These TSI categories of line shall be used for the classification of existing lines to define a target system so that the relevant performance parameters will be met.~~

shall be a combination of traffic codes. For lines where only one type of traffic is carried (for example, a freight only line), a single code may be used to describe the performances; where mixed traffic runs the category will be described by one or more codes for passenger and freight. The combined traffic codes describe the envelope within which the desired mix of traffic can be accommodated.

- (3) ~~These UTP categories~~ ies of line shall be used for the classification of existing lines to define a target system so that the relevant performance parameters will be met. ~~a combination of traffic codes. For lines where only one type of traffic is carried (for example a freight only line), a single code can be used to describe the requirements; where mixed traffic runs the category will be described by one or more codes for passenger and freight. The combined traffic codes describe the envelope within which the desired mix of traffic can be accommodated.~~

- (4) For the purpose of UTP categorisation, lines are classified generically based on the type of traffic (traffic code) characterised by the following performance parameters:
 - gauge,
 - axle load,
 - line speed,
 - train length
 - usable length of platform.

The columns for 'gauge' and 'axle load' shall be treated as minimum requirements as they directly control the trains that may run. The columns for 'line speed', 'usable length of platform' and 'train length' are indicative of the range of values that are typically applied for different traffic types and they do not directly impose restrictions on the traffic that may run over the line.

- (5) The performance parameters listed in Table 2 and Table 3 are not intended to be used to directly ascertain the compatibility between rolling stock and infrastructure.
- (6) Information defining the relation between maximum axle load and maximum speed according to type of vehicle is given in Appendix E and Appendix F.
- (7) The performance levels for types of traffic are set out in Table 2 and Table 3 here-under.


 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 14 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

Table 2 Performance parameters for passenger traffic

Traffic code	Gauge	Axle load (t)	Line speed (km/h)	Usable length of platform [m]
P1	GC	17 (*)	250-350	400
P2	GB	20 (*)	200-250	200-400
P3	DE3	22,5 (**)	120-200	200-400
P4	GB	22,5 (**)	120-200	200-400
P5	GA	20 (**)	80-120	50-200
P6	G1	12 (**)	n.a.	n.a.
P1520	S	22,5 (**)	80-160	35-400
P1600	IRL1	22,5 (**)	80-160	75-240

(*) Axle load is based on design mass in working order for power heads (and for P2 locomotives) and operational mass under normal payload for vehicles capable of carrying a payload of passengers or luggage as defined in point 2.1 of EN 15663:2009+AC:2010. The corresponding ** axle load values for vehicles capable of carrying a payload for passengers or luggage are 21,5 t for P1 and 22,5 t for P2 as defined in Appendix K to this UTP.

(**) Axle load is based on design mass in working order for power heads and locomotives as defined in point 2.1 of EN 15663:2009+AC:2010 and design mass under exceptional payload for other vehicles as defined in Appendix K to this UTP.

Table 3 Performance parameters for freight traffic

Traffic code	Gauge	Axle load (t)	Line speed (km/h)	Train length (m)
F1	GC	22,5 (*)	100-120	740-1050
F2	GB	22,5 (*)	100-120	600-1050
F3	GA	20 (*)	60-100	500-1050
F4	G1	18 (*)	n.a.	n.a.
F1520	S	25 (*)	50-120	1050
F1600	IRL1	22,5 (*)	50-100	150-450


(*) Axle load is based on design mass in working order for power heads and locomotives as defined in point 2.1 of EN 15663:2009+AC:2010 and design mass under ~~normal exceptional~~ payload for other vehicles [in accordance with point 6.3 of EN 15663:2009+AC:2010](#). ~~as defined in Appendix K to this UTP.~~

Additional performance levels¹²:

Passenger code GCC-P:

- Gauge AAR Plate H
- Axle load 25 t
- Line speed 220 km/h
- Train length 400 m

¹² To be confirmed by GCC

 OTIF	SUBSYSTEM INFRASTRUCTURE INFRASTRUCTURE			Page 15 of 106
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

Freight traffic code GCC-F:

- Gauge AAR Plate H
- Axle load 32.4 t
- Line speed 120 km/h
- Train length 2000 m

(8) For structures, axle load by itself is not sufficient to define the requirements for infrastructure. Requirements are specified for new structures in point 4.2.7.1.1 and for existing structures in point 4.2.7.4.

(9) Passenger hubs, freight hubs and connecting lines are included in the above traffic codes, as appropriate.

(10) The objective of UTPs is to facilitate international traffic but not to limit other types of traffic or to limit infrastructure capacity. States ~~are~~ may therefore ~~free~~ to have lines which are compatible with

(10) ~~Article 5(7) of Directive 2008/57/EC states: 'The TSIs shall not be an impediment to decisions by the Member States concerning the use of infrastructures for the movement of vehicles not covered by the TSIs.' It is therefore allowed to design new and upgraded lines such that will also accommodate~~In accordance with Article 4(7) of Directive (EU) 2016/797 which provides that TSIs shall not prevent the Member States from deciding on the use of infrastructures for the movement of vehicles not covered by the TSIs, it is allowed to design new and upgraded lines able to accommodate:


- gauges larger,
- axle loads higher,
- speeds greater,
- usable length of platform greater,
- trains longer

than those specified in Table 2 and Table 3. ~~larger gauges, higher axle loads, greater speeds, greater usable length of platform and longer trains than those specified.~~

(11) States are recommended to ensure that new lines of category P1 permit the operation of trains at their maximum operational speed, including when this speed is greater than 250 km/h.

(11) Without prejudice to Section 7.6 and point 4.2.7.1.2(3), when categorising a new line as P1, it shall be ensured that 'Class I' trains, according to the HS RST TSI (Commission Decision 2008/232/EC (1)), for a speed greater than 250 km/h, can run on that line up to the maximum speed.

(12) It is permissible for specific locations on the line to be designed for any or all of the performance parameters line speed, usable length of platform and train length less than those set out in Table 2 and Table 3, where duly justified to meet geographical, urban or environmental constraints.

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 16 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

4.2.2. Basic parameters characterising the infrastructure subsystem

4.2.2.1. List of Basic Parameters

The Basic Parameters characterising the infrastructure subsystem, grouped according to the aspects listed in point 2.1, are:

A. Line layout:

- a) Structure gauge (4.2.3.1),
- b) Distance between track centres (4.2.3.2),
- c) Maximum gradients (4.2.3.3),
- d) Minimum radius of horizontal curve (4.2.3.4),
- e) Minimum radius of vertical curve (4.2.3.5),

B. Track parameters:

- a) Nominal track gauge (4.2.4.1),
- b) Cant (4.2.4.2), ~~(e)~~
- ~~b~~) c) -Cant deficiency (4.2.4.3),
- ~~e~~) d) Abrupt change of cant deficiency (4.2.4.4),
- ~~d~~) e) Equivalent conicity (4.2.4.5),
- ~~e~~) f) Railhead profile for plain line (4.2.4.6),
- ~~f~~) g) Rail inclination (4.2.4.7),

C. Switches and crossings

- a) Design geometry of switches and crossings (4.2.5.1),
- b) Use of swing nose crossings (4.2.5.2),
- c) Maximum unguided length of fixed obtuse crossings (4.2.5.3),

D. Track resistance to applied loads


- a) Track resistance to vertical loads (4.2.6.1),
- b) Longitudinal track resistance (4.2.6.2),
- c) Lateral track resistance (4.2.6.3),

E. Structures resistance to traffic loads

- a) Resistance of new bridges to traffic loads (4.2.7.1),
- b) Equivalent vertical loading for new earthworks and earth pressure effects imposed on new structures (4.2.7.2),
- c) Resistance of new structures over or adjacent to tracks (4.2.7.3),
- d) Resistance of existing bridges and earthworks to traffic loads (4.2.7.4),

F. Immediate action limits on track geometry defects

- a) The immediate action limit for alignment (4.2.8.1),
- b) The immediate action limit for longitudinal level (4.2.8.2),

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 17 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

- c) The immediate action limit for track twist (4.2.8.3),
- d) The immediate action limit of track gauge as isolated defect (4.2.8.4),
- e) The immediate action limit for cant (4.2.8.5),
- f) The immediate action limits for switches and crossings (4.2.8.6),

G. Platforms

- a) Usable length of platforms (4.2.9.1),
- b) Platform height (4.2.9.2),
- c) Platform offset (4.2.9.3),
- d) Track layout alongside platforms (4.2.9.4),

H. Health, safety and environment

- a) Maximum pressure variation in tunnels (4.2.10.1),
- b) Effect of crosswinds (4.2.10.2),
- c) [Aerodynamic effect on ballasted track](#) ~~Ballast pick-up~~ (4.2.10.3)

I. Provision for operation

- a) Location markers (4.2.11.1),
- b) Equivalent conicity in service (4.2.11.2)

J. Fixed installations for servicing trains


- a) General (4.2.12.1),
- b) Toilet discharge (4.2.12.2),
- c) Train external cleaning facilities (4.2.12.3),
- ~~d)~~ [Water restocking](#) (4.2.12.4),
- ~~e)~~ ~~(e)~~ [Refuelling](#) (4.2.12.5),
- ~~f)~~ [Electric shore supply](#) (4.2.12.6),

K. Maintenance rules

- ~~a)~~ [Maintenance file](#) (4.5.1),
- ~~a)~~ ~~b)~~ [Maintenance plan](#) (4.5.2).

4.2.2.2. Requirements for Basic Parameters

- (1) These requirements are described in the following paragraphs, together with any particular conditions that may be allowed in each case for the basic parameters and interfaces concerned.
- (2) The values of basic parameters specified are only valid up to a maximum line speed of 350 km/h.
- (3) For Ireland and for the United Kingdom in respect of Northern Ireland network the values of basic parameters specified are only valid up to a maximum line speed of 165 km/h.
- (4) In case of multi-rail track, requirements of this UTP are to be applied separately to each pair of rails designed to be operated as separate track.

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 18 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

- (5) Requirements for lines representing specific cases are described under point 7.7.
- (6) A short section of track with devices to allow transition between different nominal track gauges is allowed.
- (7) Requirements are described for the subsystem under normal service conditions. Consequences, if any, of the execution of works, which may require temporary exceptions as far as the subsystem performance is concerned, are dealt with in point 4.4.
- (8) The performance levels of trains can be enhanced by adopting specific systems, such as vehicle body tilting. Special conditions are allowed for running such trains, provided they do not entail restrictions for other trains not equipped with such systems.

4.2.3. Line layout

4.2.3.1. Structure gauge


- (1) The upper part of the structure gauge shall be set on the basis of the gauges selected according to point 4.2.1. Those gauges are defined in Annex C and in Annex D, point D.4.8 of EN 15273-3:2013.
- (2) The lower part of the structure gauge shall be GI2 as defined in Annex C of EN 15273-3:2013. Where tracks are equipped with rail brakes, structure gauge GI1 as defined in Annex C of EN 15273-3:2013 shall apply for the lower part of the gauge.
- (3) Calculations of the structure gauge shall be done using the kinematic method in accordance with the requirements of sections 5, 7, 10 and the Annex C and Annex D, point D.4.8 of EN 15273-3:2013.
- (4) Instead of points (1) to (3), for the 1 520 mm track gauge system, all traffic codes selected according to point 4.2.1 are applied with the uniform structure gauge ‘S’ as defined in Appendix H to this UTP.
- (5) Instead of points (1) to (3), for the 1 600 mm track gauge system, all traffic codes selected according to point 4.2.1 are applied with the uniform structure gauge IRL1 as defined in Appendix O to this UTP.

4.2.3.2. Distance between track centres

- (1) The distance between track centres shall be set on the basis of the gauges selected according to point 4.2.1.
- (2) The nominal horizontal distance between track centres for new lines shall be specified for the design and shall not be smaller than the values from the Table 4; it considers margins for aerodynamic effects.

Table 4 Minimum nominal horizontal distance between track centres

Maximum allowed speed (km/h)	Minimum nominal horizontal distance between track centres (m)
$160 < v \leq 200$	3,80
$200 < v \leq 250$	4,00
$250 < v \leq 300$	4,20
$v > 300$	4,50

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 19 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

- (3) The distance between track centres shall at least satisfy the requirements for the limit installation distance between track centres, defined according section 9 of EN 15273-3:2013.
- (4) Instead of points (1) to (3), for the 1 520 mm track gauge system, the nominal horizontal distance between track centres shall be specified for the design and shall not be smaller than the values from the Table 5; it considers margins for aerodynamic effects.

Table 5 Minimum nominal horizontal distance between track centres for the 1 520 mm track gauge system

Maximum allowed speed (km/h)	Minimum nominal horizontal distance between track centres (m)
$v \leq 160$	4,10
$160 < v \leq 200$	4,30
$200 < v \leq 250$	4,50
$v > 250$	4,70

- (5) Instead of point (2), for the 1 668 mm track gauge system, the nominal horizontal distance between track centres for new lines shall be specified for the design and shall not be smaller than the values from the Table 6, it considers margins for aerodynamic effects.


Table 6 Minimum nominal horizontal distance between track centres for the 1 668 mm track gauge system

Maximum allowed speed (km/h)	Minimum nominal horizontal distance between track centres (m)
$160 < v \leq 200$	3,92
$200 < v \leq 250$	4,00
$250 < v \leq 300$	4,30
$300 < v \leq 350$	4,50

- (6) Instead of points (1) to (3), for the 1 600 mm track gauge system, the distance between track centres shall be set on the basis of the gauges selected according to point 4.2.1. The nominal horizontal distance between track centres shall be specified for the design and shall not be less than 3,57 m for gauge IRL1; it considers margins for aerodynamic effects.

4.2.3.3. Maximum gradients

- (1) Gradients of tracks through passenger platforms of new lines shall not be more than 2,5 mm/m, where vehicles are intended to be regularly attached or detached.
- (2) Gradients of new stabling tracks intended for parking rolling stock shall not be more than 2,5 mm/m unless specific provision is made to prevent the rolling stock from running away.

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 20 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

- (3) Gradients as steep as 35 mm/m are allowed for main tracks on new P1 lines dedicated to passenger traffic at the design phase provided the following ‘envelope’ requirements are observed:
 - a) the slope of the moving average profile over 10 km is less than or equal to 25 mm/m.
 - b) the maximum length of continuous 35 mm/m gradient does not exceed 6 km.

4.2.3.4. Minimum radius of horizontal curve

The minimum design radius of horizontal curve shall be selected with regard to the local design speed of the curve.

- (1) The minimum horizontal design curve radius for new lines shall not be less than 150 m.
- (2) Reverse curves (other those in marshalling yards where wagons are shunted individually) with radii in the range from 150 m up to 300 m for new lines shall be designed to prevent buffer locking. For straight intermediate track elements between the curves, Table 43 and Table 44 of Appendix I shall apply. For non-straight intermediate track elements, a detailed calculation shall be made in order to check the magnitude of the end throw differences.
- (3) Instead of point (2), for the 1 520 mm track gauge system, reverse curves with radii in the range from 150 m up to 250 m shall be designed with a section of straight track of at least 15 m between the curves.


4.2.3.5. Minimum radius of vertical curve

- (1) The radius of vertical curves (except for humps in marshalling yards) shall be at least 500 m on a crest or 900 m in a hollow.
- (2) For humps in marshalling yards the radius of vertical curves shall be at least 250 m on a crest or 300 m in a hollow.
- (3) Instead of point (1), for the 1 520 mm track gauge system the radius of vertical curves (except the marshalling yards) shall be at least 5 000 m both on a crest and in a hollow.
- (4) Instead of point (2), for the 1 520 mm track gauge system and for humps in marshalling yards the radius of vertical curves shall be at least 350 m on a crest and 250 m in a hollow.

4.2.4. Track parameters

4.2.4.1. Nominal track gauge

- (1) European standard nominal track gauge shall be 1 435 mm.
- (2) Instead of point (1), for the 1 520 mm track gauge system the nominal track gauge shall be 1 520 mm.
- (3) Instead of point (1), for the 1 668 mm track gauge system, the nominal track gauge shall be 1 668 mm.
- (4) Instead of point (1), for the 1 600 mm track gauge system the nominal track gauge shall be 1 600 mm.

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 21 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

4.2.4.2. Cant

- (1) The design cant for lines shall be limited as defined in Table 7.

Table 7 Design cant (mm)

	Freight and mixed traffic	Passenger traffic
Ballasted track	160	180
Non ballasted track	170	180

- (2) The design cant on tracks adjacent to station platforms where trains are intended to stop in normal service shall not exceed 110 mm.
- (3) New lines with mixed or freight traffic on curves with a radius less than 305 m and a cant transition steeper than 1 mm/m, the cant shall be restricted to the limit given by the following formula:

$$D \leq (R - 50)/1,5$$

where D is the cant in mm and R is the radius in m.

- (4) Instead of points (1) to (3), for the 1 520 mm track gauge system the design cant shall not exceed 150 mm.
- (5) Instead of point (1), for the 1 668 mm track gauge system, the design cant shall not exceed 180~~5~~ mm.
- (6) Instead of point (2), for the 1 668 mm track gauge system, the design cant on tracks adjacent to station platforms where trains are intended to stop in normal service shall not exceed 125 mm.
- (7) Instead of point (3), for the 1 668 mm track gauge system, for new lines with mixed or freight traffic on curves with a radius less than 250 m, the cant shall be restricted to the limit given by the following formula:

$$D \leq 0,9 * (R - 50)$$

where D is the cant in mm and R is the radius in m.


- (8) Instead of point (1), for the 1 600 mm track gauge system the design cant shall not exceed 185 mm.

4.2.4.3. Cant deficiency

- (1) The maximum values for cant deficiency are set out in Table 8.

Table 8 Maximum cant deficiency (mm)

Design speed (km/h)	$v \leq 160$	$160 < v \leq 300$	$v > 300$
For operation of rolling stock conforming to the UTP for locomotives and passenger rolling stock (UTP LOC&PAS)	153		100

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 22 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

For operation of rolling stock conforming to the UTP for freight wagons (UTP WAG)	130	–	–
---	-----	---	---


- (2) It is permissible for trains specifically designed to travel with higher cant deficiency (for example multiple units with axle loads lower than set out in table 2; vehicles with special equipment for the negotiation of curves) to run with higher cant deficiency values, subject to a demonstration that this can be achieved safely.
- (3) Instead of point (1), for all types of rolling stock of the 1 520 mm track gauge system the cant deficiency shall not exceed 115 mm. This is valid for speeds up to 200 km/h.
- (4) Instead of point (1), for the 1 668 mm track gauge system, the maximum values for cant deficiency are set out in Table 9.

Table 9 Maximum cant deficiency for the 1 668 mm track gauge system (mm)

Design speed (km/h)	$v \leq 160$	$160 < v \leq 300$	$v > 300$
For operation of rolling stock conforming to the UTP for locomotives and passenger rolling stock (UTP LOC&PAS)	175		115
For operation of rolling stock conforming to the UTP for freight wagons (UTP WAG)	150	–	–

4.2.4.4. Abrupt change of cant deficiency

- (1) The maximum values of abrupt change of cant deficiency shall be:
 - a) 130 mm for $v \leq 60$ km/h,
 - b) 125 mm for $60 \text{ km/h} < v \leq 200$ km/h,
 - c) 85 mm for $200 \text{ km/h} < v \leq 230$ km/h
 - d) 25 mm for $v > 230$ km/h.
- (2) Where $v \leq 40$ km/h and cant deficiency ≤ 75 mm both before and after an abrupt change of curvature, the value of abrupt change of cant deficiency may be raised to 150 mm.
- (3) Instead of points (1) and (2), for the 1 520 mm track gauge system the maximum values of abrupt change of cant deficiency shall be:
 - a) 115 mm for $v \leq 200$ km/h,
 - b) 85 mm for $200 \text{ km/h} < v \leq 230$ km/h,
 - c) 25 mm for $v > 230$ km/h.
- (4) Instead of point (1), for the 1 668 mm track gauge system, the maximum design values of abrupt change of cant deficiency shall be:
 - a) ~~15~~10 mm for $v \leq$ ~~11~~45 km/h,
 - a)b) 115 mm for $45 \text{ km/h} < v < 100$ km/h
 - b)c) $(399-v)/2,6$ [mm] for 100 ~~15~~ km/h $< v \leq 220$ km/h,

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 23 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

e)d) 70 mm for $220 \text{ km/h} < v \leq 230 \text{ km/h}$.

e)e) Abrupt change of cant deficiency is not allowed for speeds of more than 230 km/h.

4.2.4.5. Equivalent conicity

- (1) The limiting values for equivalent conicity quoted in Table 10 shall be calculated for the amplitude (y) of the wheelset's lateral displacement:

$$- y = 3 \text{ mm}, \quad \text{if } (TG - SR) \geq 7 \text{ mm}$$

$$- y = \left(\frac{(TG - SR) - 1}{2} \right), \quad \text{if } 5 \text{ mm} \leq (TG - SR) < 7 \text{ mm}$$

$$- y = 2 \text{ mm}, \quad \text{if } (TG - SR) < 5 \text{ mm}$$

where TG is the track gauge and SR is the distance between the flange contact faces of the wheelset.

- (2) No assessment of equivalent conicity is required for switches and crossings.
- (3) Design ~~values of~~ track gauge, rail head profile and rail inclination for plain line shall be selected to ensure that the equivalent conicity limits set out in Table 10 are not exceeded.


Table 10 Equivalent conicity design limit values

	Wheel profile
Speed range (km/h)	S1002, GV1/40
$v \leq 60$	Assessment not required
$60 < v \leq 200$	0,25
$200 < v \leq 280$	0,20
$v > 280$	0,10

- (4) The following wheelsets shall be modelled passing over the designed track conditions (simulated by calculation according to EN 15302:2008+A1:2010):
- S 1002 as defined in Annex C of EN 13715:2006+A1:2010 with SR1.
 - S 1002 as defined in Annex C of EN 13715:2006+A1:2010 with SR2.
 - GV 1/40 as defined in Annex B of EN 13715:2006+A1:2010 with SR1.
 - GV 1/40 as defined in Annex B of EN 13715:2006+A1:2010 with SR2.

For SR1 and SR2 the following values apply:

- For the 1 435 mm track gauge system SR1 = 1 420 mm and SR2 = 1 426 mm.
- For the 1 524 mm track gauge system SR1 = 1 505 mm and SR2 = 1 511 mm.
- For the 1 600 mm track gauge system SR1 = 1 585 mm and SR2 = 1 591 mm.
- For the 1 668 mm track gauge system SR1 = 1 653 mm and SR2 = 1 659 mm.


 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 24 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

- (5) Instead of points (1) to (4), for the 1 520 mm track gauge system, no assessment of equivalent conicity is required.

4.2.4.6. Railhead profile for plain line

- (1) The railhead profile shall be selected from the range set out in Annex A of EN 13674-1:2011, Annex A of EN13674-4:2006+A1:2009 or shall be in accordance with as defined in point (2).
- (2) The design of railhead profiles for plain line shall comprise:
- a lateral slope on the side of the railhead angled to between vertical and 1/16 with reference to the vertical axis of the railhead;
 - the vertical distance between the top of this lateral slope and the top of the rail shall be less than 20 mm;
 - a radius of at least 12 mm at the gauge corner;
 - the horizontal distance between the crown of the rail and the tangent point shall be between 31 and 37,5 mm.

Figure 1 Railhead profile

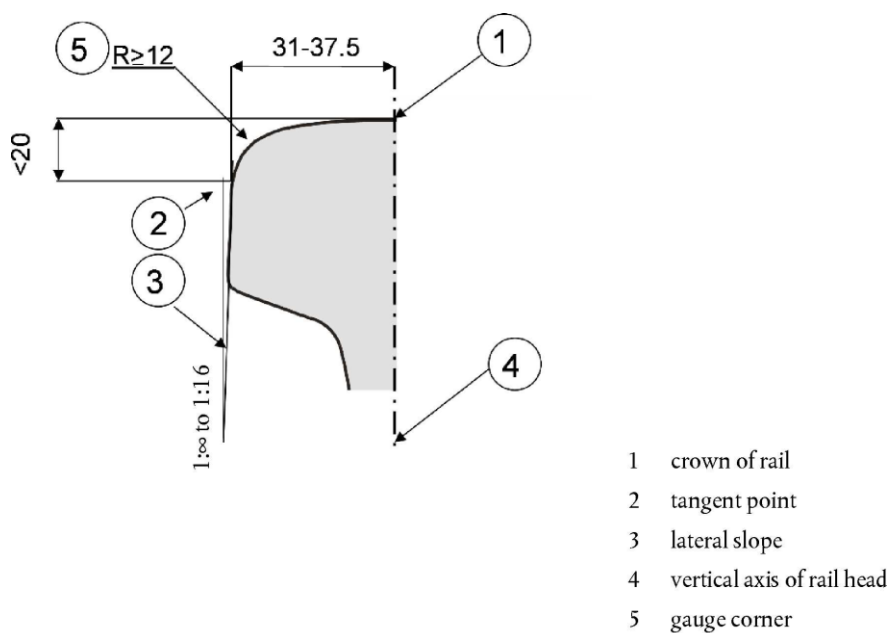


- (3) These requirements are not applicable to expansion devices.

4.2.4.7. Rail inclination

4.2.4.7.1. Plain line

- (1) The rail shall be inclined towards the centre of the track.

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 25 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

- (2) [For tracks intended to be operated at speeds greater than 60 km/h](#), the rail inclination for a given route shall be selected from the range 1/20 to 1/40.
- (3) For sections of not more than 100 m between switches and crossings without inclination where the running speed is no more than 200 km/h, the laying of rails without inclination is allowed.

4.2.4.7.2. Requirements for switches and crossings

- (1) The rail shall be designed to be either vertical or inclined.
- (2) If the rail is inclined, the designed inclination shall be selected from the range 1/20 to 1/40.
- (3) The inclination can be given by the shape of the active part of the rail head profile.
- (4) Within switches and crossings where the running speed is more than 200 km/h and no more than 250 km/h, the laying of rails without inclination is allowed provided that it is limited to sections not exceeding 50 m.
- (5) For speeds of more than 250 km/h the rails shall be inclined.

4.2.5. Switches and crossings

4.2.5.1. Design geometry of switches and crossings

Point 4.2.8.6 of this UTP defines immediate action limits for switches and crossings that are compatible with geometrical characteristics of wheelsets as defined in the rolling stock UTPs. It will be the task of the infrastructure manager to decide geometrical design values appropriate to its maintenance plan.

4.2.5.2. Use of swing nose crossing

For speeds higher than 250 km/h switches and crossings shall be equipped with swing-nose crossings.

4.2.5.3. Maximum unguided length of fixed obtuse crossings


The design value of the maximum unguided length of fixed obtuse crossings shall be in accordance with the requirements set out in Appendix J to this UTP.

4.2.6. Track resistance to applied loads

4.2.6.1. Track resistance to vertical loads

The track design, including switches and crossings, shall take into account at least the following forces:

- a) the axle load selected according to point 4.2.1;
- b) maximum vertical wheel forces. Maximum wheel forces for defined test conditions are defined in EN 14363:2005 point 5.3.2.3.
- c) vertical quasi-static wheel forces. Maximum quasi-static wheel forces for defined test conditions are defined in EN 14363:2005 points 5.3.2.3.

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 26 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

4.2.6.2. Longitudinal track resistance

4.2.6.2.1. Design forces

The track, including switches and crossings, shall be designed to withstand longitudinal forces equivalent to the force arising from braking of 2,5 m/s² for the performance parameters chosen in accordance with point 4.2.1.

4.2.6.2.2. Compatibility with braking systems

- (1) The track, including switches and crossings, shall be designed to be compatible with the use of magnetic braking systems for emergency braking.

- (2) [Provisions for the use of eddy current braking systems on track shall be defined at operational level by the infrastructure manager on the basis of the specific characteristics of the track, including switches and crossings. The conditions of use of this braking system are registered in accordance with](#)~~The requirements for the design of track, including switches and crossings, which are compatible with the use of eddy current braking systems are an open point.~~

[the UTP TCRC concerning train composition and route compatibility checks.](#)

[Commission Implementing Regulation \(EU\) 2019/777¹³ \(RINF\).](#)

- ~~(2)~~(3) For the 1 600 mm track gauge system it shall be allowed not to apply point (1).

4.2.6.3. Lateral track resistance

The track design, including switches and crossings, shall take into account at least the following forces:

- lateral forces; Maximum lateral forces exerted by a wheel set on the track for defined test conditions are defined in EN 14363:2005 point 5.3.2.2.
- quasi-static guiding forces; Maximum quasi-static guiding forces Yqst for defined radii and test conditions are defined in EN 14363:2005 point 5.3.2.3.

4.2.7. Structures resistance to traffic loads


The requirements of EN 1991-2:2003/AC:2010 and Annex A2 to EN 1990:2002 issued as EN 1990:2002/ A1:2005 specified in this section of the UTP are to be applied in accordance with the corresponding points in the national annexes to these standards if they exist.

4.2.7.1. Resistance of new bridges to traffic loads

4.2.7.1.1. Vertical loads

- (1) Structures shall be designed to support vertical loads in accordance with the following load models, defined in EN 1991-2:2003/AC:2010:
- Load Model 71, as set out in EN 1991-2:2003/AC:2010 point 6.3.2 (2)P

¹³ [Commission Implementing Regulation \(EU\) 2019/777 of 16 May 2019 on the common specifications for the register of railway infrastructure and repealing Implementing Decision 2014/880/EU \(OJ L 139 I, 27.5.2019, p. 312\).](#)

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 27 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

b) In addition, for continuous bridges, Load Model SW/0, as set out in EN 1991-2:2003/AC:2010 point 6.3.3 (3)P

- (2) The load models shall be multiplied by the factor alpha (α) as set out in EN 1991-2:2003/AC:2010 points 6.3.2 (3)P and 6.3.3 (5)P.
- (3) The value of factor alpha (α) shall be equal to or greater than the values set out in Table 11.

Table 11 Factor alpha (α) for the design of new structures

Type of traffic	Minimum factor alpha (α)
P1, P2, P3, P4	1,0
P5	0,91
P6	0,83
P1520	Open point 1
P1600	1,1
F1, F2, F3	1,0
F4	0,91
F1520	Open point 1,46
F1600	1,1

4.2.7.1.2. Allowance for dynamic effects of vertical loads


- (1) The load effects from the Load Model 71 and Load Model SW/0 shall be enhanced by the dynamic factor phi (Φ) as set out in EN 1991-2:2003/AC:2010 points 6.4.3 (1)P and 6.4.5.2 (2).
- (2) For bridges for speeds over 200 km/h where EN 1991-2:2003/AC:2010 paragraph 6.4.4 requires a dynamic analysis to be carried out the structure shall additionally be designed for HSLM defined in EN 1991-2:2003/AC:2010 paragraphs 6.4.6.1.1 (3) to (6) inclusive.
- (3) It is permissible to design new bridges such that they will also accommodate an individual passenger train with higher axle loads than covered by HSLM. The dynamic analysis shall be undertaken using the characteristic value of the loading from the individual train taken as the design mass under normal payload in accordance with Appendix K with an allowance for passengers in standing areas in accordance with Note 1 of Appendix K.

4.2.7.1.3. Centrifugal forces

Where the track on a bridge is curved over the whole or part of the length of the bridge, the centrifugal force shall be taken into account in the design of structures as set out in EN 1991-2:2003/AC:2010 paragraphs 6.5.1 (2), (4)P and (7).

4.2.7.1.4. Nosing forces

The nosing force shall be taken into account in the design of structures as set out in EN 1991-2:2003/AC:2010 point 6.5.2.

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 28 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

4.2.7.1.5. Actions due to traction and braking (longitudinal loads)

Traction and braking forces shall be taken into account in the design of structures as set out in EN 1991-2:2003/AC:2010 paragraphs 6.5.3 (2)P, (4), (5), (6).and (7)P.

4.2.7.1.6. Design track twist due to rail traffic actions

The maximum total design track twist due to rail traffic actions shall not exceed the values set out in paragraph A2.4.4.2.2(3)P in Annex A2 to EN 1990:2002 issued as EN 1990:2002/A1:2005.

4.2.7.2. Equivalent vertical loading for new earthworks and earth pressure effects


- (1) Earthworks shall be designed and earth pressure effects shall be specified taking into account the vertical loads produced by the Load Model 71, as set out in EN 1991-2:2003/AC:2010 paragraph 6.3.2(2).
- (2) The equivalent vertical loading shall be multiplied by the factor alpha (a) as set out in EN 1991-2:2003/AC:2010 paragraph 6.3.2 (3)P. The value of a shall be equal to or greater than the values set out in Table 11.

4.2.7.3. Resistance of new structures over or adjacent to tracks

Aerodynamic actions from passing trains shall be taken into account as set out in EN 1991-2:2003/AC:2010 paragraphs 6.6.2 to 6.6.6 inclusive.

4.2.7.4. Resistance of existing bridges and earthworks to traffic loads

- (1) Bridges and earthworks shall be brought to a specified level of interoperability according to the UTP category of line as defined in point 4.2.1.
- (2) The minimum capability requirements for structures for each traffic code are given in Appendix E. The values represent the minimum target level that structures must be capable of for the line to be declared interoperable.
- (3) The following cases are relevant:
 - a) Where an existing structure is replaced by a new structure then the new structure shall be in accordance with the requirements of point 4.2.7.1 or point 4.2.7.2.
 - b) If the minimum capability of the existing structures expressed by the published EN line category in combination with the allowed speed satisfies the requirements in Appendix E then the existing structures satisfy the relevant interoperability requirements.
 - c) Where the capability of an existing structure does not satisfy the requirements in Appendix E and works (e.g. strengthening) are being carried out to raise the capability of the structure to meet the requirements of this UTP (and the structure is not to be replaced by a new structure) then the structure shall be brought into conformity with the requirements in Appendix E.
- (4) For the United Kingdom of Great Britain and Northern Ireland networks, in paragraphs (2) and (3) above the EN line category may be replaced by Route Availability (RA) number (delivered in

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 29 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

accordance with the national technical rule notified for this purpose) and consequently reference to Appendix E are replaced by reference to Appendix F.

4.2.8. Immediate action limits on track geometry defects

4.2.8.1. The immediate action limit for alignment


- (1) The immediate action limits for isolated defects in alignment are set out in point 8.5 of EN 13848-5:2008+A1:2010. Isolated defects shall not exceed the limits of wavelength range D1 as set out in Table 6 of the EN Standard
- (2) The immediate action limits for isolated defects in alignment for speeds of more than 300 km/h are an open point.

4.2.8.2. The immediate action limit for longitudinal level

- (1) The immediate action limits for isolated defects in longitudinal level are set out in point 8.3 of EN 13848-5:2008+A1:2010. Isolated defects shall not exceed the limits of wavelength range D1 as set out in table 5 of the EN Standard
- (2) The immediate action limits for isolated defects in longitudinal level for speeds of more than 300 km/h are an open point.

4.2.8.3. The immediate action limit for track twist

- (1) The immediate action limit for track twist as an isolated defect is given as a zero to peak value. Track twist is defined in EN 13848-1:2003+A1:2008 point 4.6.
- (2) The track twist limit is a function of the measurement base applied according to EN 13848-5:2008+A1:2010 point 8.6.
- (3) The infrastructure manager shall set out in the maintenance plan the base-length on which it will measure the track in order to check compliance with this requirement. The base-length of measurement shall include at least one base between 2 and 5 m.
- (4) Instead of points (1) and (2), for the 1 520 mm track gauge system the track twist, for a base length of 10 m, shall be not more than:
 - a) 16 mm for passenger lines with $v > 120$ km/h or freight lines with $v > 80$ km/h
 - b) 20 mm for passenger lines with $v \leq 120$ km/h or freight lines with $v \leq 80$ km/h
- (5) Instead of point (3), for the 1 520 mm track gauge system the Infrastructure Manager shall set out in the maintenance plan the base-length on which it will measure the track in order to check compliance with this requirement. The base-length of measurement shall include at least one base of 10 m.
- (6) Instead of point (2), for the 1 668 mm track gauge system, the track twist limit is a function of the measurement base applied according to one of the following equations depending on the cant:
 - a) Twist limit = $(20/l + 3)$ for $u \leq 0,67 \times (r - 100)$ with a maximum value of:
$$7 \text{ mm/m for speeds } v \leq 200 \text{ km/h, } 5 \text{ mm/m for speed } v > 200 \text{ km/h}$$

 OTIF	SUBSYSTEM INFRASTRUCTURE		Page 30 of 106	
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

b) Twist limit = $(20/l + 1,5)$ for $0,67 \times (r - 100) < u < 0,9 \times (r - 50)$ with a maximum value of:

6 mm/m for $l \leq 5$ m, 3 mm/m for $l > 13$ m

u = cant (mm), l = twist base length (m), r = horizontal curve radius (m)

4.2.8.4. The immediate action limit of track gauge as an isolated defect

(1) The immediate action limits of track gauge as an isolated defect are set out in Table 12.

Table 12 Immediate action limits of track gauge

Speed (km/h)	Dimensions (mm)	
	Minimum track gauge	Maximum track gauge
$v \leq 120$	1 426	1 470
$120 < v \leq 160$	1 427	1 470
$160 < v \leq 230$	1 428	1 463
$v > 230$	1 430	1 463

(2) Instead of point (1), for the 1 520 track gauge system the immediate action limits of track gauge as an isolated defect are set out in Table 13.

Table 13 Immediate action limits of track gauge for 1 520 mm track gauge system

Speed (km/h)	Dimensions (mm)	
	Minimum track gauge	Maximum track gauge
$v \leq 140$	1 512	1 548
$v > 140$	1 512	1 536

(3) Instead of point (1), for the 1 600 track gauge system the immediate action limits of track gauge as an isolated defect are:

a) minimum track gauge: 1 591 mm

b) maximum track gauge: 1 635 mm.


4.2.8.5. The immediate action limit for cant

(1) The maximum cant allowed in service is 180 mm.

(2) The maximum cant allowed in service is 190 mm for dedicated passenger traffic lines.

(3) Instead of points (1) and (2), for the 1 520 mm track gauge system, the maximum cant allowed in service is 150 mm.


(4) Instead of points (1) and (2), for the 1 600 mm track gauge system, the maximum cant allowed in service is 185 mm.

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 31 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020


- (5) Instead of points (1) and (2), for the 1 668 mm track gauge system, the maximum cant allowed in service is 200 mm.

4.2.8.6. The immediate action limits for switches and crossings

Figure 2 Point retraction in fixed common crossings

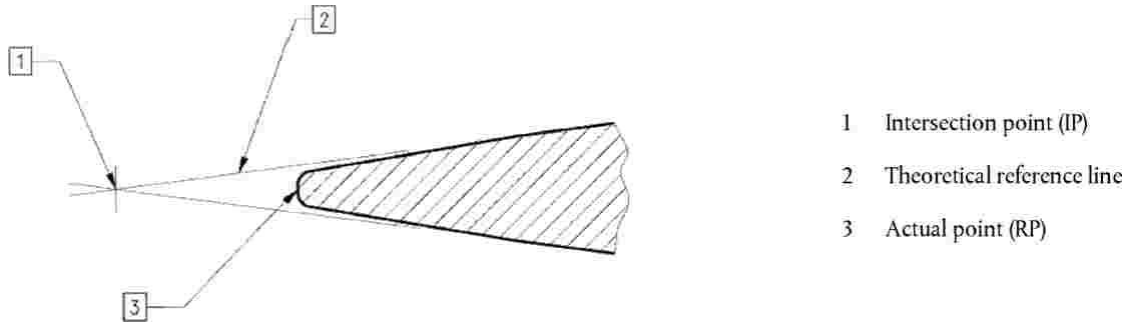

- (1) The technical characteristics of switches and crossings shall comply with the following in-service values:
- Maximum value of free wheel passage in switches: 1 380 mm.
This value can be increased if the infrastructure manager demonstrates that the actuation and locking system of the switch is able to resist the lateral impact forces of a wheelset.
 - Minimum value of fixed nose protection for common crossings: 1 392 mm.
This value is measured 14 mm below the running surface, and on the theoretical reference line, at an appropriate distance back from the actual point (RP) of the nose as indicated in Figure 2.
For crossings with point retraction, this value can be reduced. In this case the infrastructure manager shall demonstrate that the point retraction is sufficient to guarantee that the wheel will not hit the nose at the actual point (RP).
 - Maximum value of free wheel passage at crossing nose: 1 356 mm.
 - Maximum value of free wheel passage at check rail/wing rail entry: 1 380 mm.
 - Minimum flangeway width: 38 mm.
 - Minimum flangeway depth: 40 mm.
 - Maximum height of check rail: 70 mm
- (2) All relevant requirements for switches and crossings are also applicable to other technical solutions using switch rails, for example side modifiers used in multi-rail track.
- (3) Instead of point (1), for the 1 520 mm track gauge system the technical characteristics of switches and crossings shall comply with the following in-service values:
- Minimum value of bypass at the narrowest location between open switch rail and stock rail is 65 mm.
 - Minimum value of fixed nose protection for common crossings is 1 472 mm
 - This value is measured 13 mm below the running surface, and on the theoretical reference line, at an appropriate distance back from the actual point (RP) of the nose as indicated in Figure 2.

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 32 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

For crossings with point retraction, this value can be reduced. In this case the Infrastructure Manager shall demonstrate that the point retraction is sufficient to guarantee that the wheel will not hit the nose at the actual point (RP).

- d) Maximum value of free wheel passage at crossing nose is 1 435 mm
 - e) Minimum flangeway width is 42 mm
 - f) Minimum flangeway depth is 40 mm
 - g) Maximum height of check rail is 50 mm
- (4) Instead of point (1), for the 1 600 mm track gauge system the technical characteristics of switches and crossings shall comply with the following in-service values:
- a) Maximum value of free wheel passage in switches: 1 546 mm. This value can be increased if the infrastructure manager demonstrates that the actuation and locking system of the switch is able to resist the lateral impact forces of a wheelset.
 - b) Minimum value of fixed nose protection for common crossings: 1 556 mm. This value is measured 14 mm below the running surface, and on the theoretical reference line, at an appropriate distance back from the actual point (RP) of the nose as indicated in Figure 2. For crossings with point retraction, this value can be reduced. In this case the infrastructure manager shall demonstrate that the point retraction is sufficient to guarantee that the wheel will not hit the nose at the actual point (RP).
 - c) Maximum value of free wheel passage at crossing nose: 1 520 mm.
 - d) Maximum value of free wheel passage at check rail/wing rail entry: 1 546 mm.
 - e) Minimum flangeway width: 38 mm.
 - f) Minimum flangeway depth: 40 mm.
 - g) Maximum height of check rail above head of running rail: 25 mm.

4.2.9. Platforms


- (1) The requirements of this point are only applicable to passenger platforms where trains are intended to stop in normal service.
- (2) For the requirements of this point it is permissible to design platforms required for the current service requirement provided provision is made for the reasonably foreseeable future service requirements. When specifying the interfaces with trains intended to stop at the platform, consideration shall be given to both the current service requirements and the reasonably foreseeable service requirements at least 10 years following the bringing into service of the platform.

4.2.9.1. Usable length of platforms

The usable length of a platform shall be defined according to point 4.2.1.

4.2.9.2. Platform height

- (1) The nominal platform height

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 33 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

recommended is

Shall be

550 mm or 760 mm above the running surface for radii of 300 m or more.

- (2) For smaller radii the nominal platform height may be adjusted depending on the platform offset to minimise the stepping distance between the train and the platform.

- (3) (reserved)

For platforms where trains, which are outside the scope of the LOC&PAS TSI, are intended to stop, different provisions for the nominal platform height might apply.

- (4) Instead of points (1) and (2), for the 1 520 mm track gauge system the nominal platform height

is recommended to

shall

be 200 mm or 550 mm above the running surface.

- (5) Instead of points (1) and (2), for the 1 600 mm track gauge system the nominal platform height

is recommended to

shall

be 915 mm above the running surface.

4.2.9.3. Platform offset

- (1) The distance between the track centre and the platform edge parallel to the running plane (b_q), as defined in chapter 13 of EN 15273-3:2013, shall be set on the basis of the installation limit gauge ($b_{q\text{lim}}$). The installation limit gauge shall be calculated on the basis of the gauge G1.
- (2) The platform shall be built close to the gauge within a maximum tolerance of 50 mm. The value for b_q shall therefore respond to:

$$b_{q\text{lim}} \leq b_q \leq b_{q\text{lim}} + 50 \text{ mm.}$$


- (3) Instead of points (1) and (2), for the 1 520 mm track gauge system the platform offset shall be:

- a) 1 920 mm for platforms with heights of 550 mm and
- b) 1 745 mm for platforms with height of 200 mm.

- (4) Instead of points (1) and (2), for the 1 600 mm track gauge system the platform offset shall be 1 560 mm.

4.2.9.4. Track layout alongside platforms

- (1) Track adjacent to the platforms for new lines shall preferably be straight, but shall nowhere have a radius of less than 300 m.
- (2) No values are specified for an existing track alongside new, renewed or upgraded platforms.

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 34 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

4.2.10. Health, safety and environment

4.2.10.1. Maximum pressure variations in tunnels

- (1) Any tunnel or underground structure intended to be operated at speeds greater than or equal to 200 km/h has to provide that maximum pressure variation, caused by the passage of a train running at the maximum allowed speed in the tunnel, do not exceed 10 kPa during the time taken for the train to pass through the tunnel.
- (2) Above requirement has to be fulfilled along the outside of any train
composed of vehicles
|
complying with the UTP for locomotives and passenger rolling stock (UTP LOC&PAS).

4.2.10.2. Effect of crosswinds

- (1) A line is interoperable from the cross wind point of view if safety is ensured for a reference train running along that line under the most critical operational conditions.
- (2) The rules for proving conformity shall take into account the characteristic wind curves of the reference trains defined in the UTP LOC&PAS.
- (3) If safety cannot be achieved without mitigating measures, either due to the geographic situation or to other specific features of the line, the infrastructure manager shall take the necessary measures to maintain the safety, for example by:
 - locally reducing train speeds, possibly temporarily during periods at risk of storms,
 - installing equipment to protect the track section concerned from cross winds,
 - other appropriate means.
- (4) It shall be demonstrated that safety is achieved after measures taken.


4.2.10.3. Aerodynamic effect on ballasted track~~Ballast pick up~~

- (1) The aerodynamic interaction between rolling stock and infrastructure may cause the lifting and further blowing away of ballast stones from the track bed in plain line and switches and crossings (Ballast pick up). This risk shall be mitigated.
- (2) The requirements for the infrastructure subsystem aimed at mitigating the risk for 'ballast pick up' apply only to lines intended to be operated at~~with maximum~~ speed greater than ~~or equal to~~ 250 km/h.
- (3) The requirements of point (2) above are an open point.

4.2.11. Provision for operation

4.2.11.1. Location markers

Location markers shall be provided at nominal intervals along the track of not more than 1000 m.

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 35 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

4.2.11.2. Equivalent conicity in service

- (1) If ride instability is reported, the railway undertaking and the infrastructure manager shall localise the section of the line

according to the procedures applicable in the State concerned so as to execute an investigation

in a joint investigation

according paragraphs (2) and (3) hereafter.

Note: This joint investigation is also specified in point 4.2.3.4.3.2 of UTP LOC&PAS for action on rolling stock.

- (2) The infrastructure manager shall measure the track gauge and the railhead profiles at the site in question at a distance of approximate 10 m. The mean equivalent conicity over 100 m shall be calculated by modelling with the wheelsets (a) – (d) mentioned in paragraph 4.2.4.5(4) of this UTP in order to check for compliance, for the purpose of the joint investigation, with the limit equivalent conicity for the track specified in Table 14.

Table 14 Equivalent conicity in service limit values for the track (for the purpose of joint investigation)

Speed range (km/h)	Maximum value of mean equivalent conicity over 100 m
$v \leq 60$	assessment not required
$60 < v \leq 120$	0,40
$120 < v \leq 160$	0,35
$160 < v \leq 230$	0,30
$v > 230$	0,25

- (3) If the mean equivalent conicity over 100 m complies with the limit values in Table 14, a joint investigation by the railway undertaking and the infrastructure manager shall be undertaken to specify the reason for the instability.


4.2.12. Fixed installations for servicing trains

4.2.12.1. General

This point 4.2.12 sets out the infrastructure elements of the maintenance subsystem required for servicing trains.

4.2.12.2. Toilet discharge

Fixed installations for toilet discharge shall be compatible with the characteristics of the retention toilet system specified in the ~~rolling stock~~ UTP [LOC & PAS](#).

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 36 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

4.2.12.3. Train external cleaning facilities

- (1) Where a washing plant is provided it shall be able to clean the outer sides of single or double-deck trains between a height of:
 - a) 500 to 3 500 mm for a single-deck train,
 - b) 500 to 4 300 mm for double-deck trains.
- (2) The washing plant shall be designed so that trains can be driven through it at any speed between 2 km/h and 5 km/h.

4.2.12.4. Water restocking

- (1) Fixed equipment for water restocking shall be compatible with the characteristics of the water system specified in the ~~rolling-stock~~-UTP [LOC & PAS](#).
- (2) Fixed equipment for drinking water supply on the interoperable network shall be supplied with drinking water

in accordance with the provisions applicable in the state concerned.

meeting the requirements of Council Directive 98/83/EC ⁽¹⁴⁾.

4.2.12.5. Refuelling

Refuelling equipment shall be compatible with the characteristics of the fuel system specified in the ~~rolling-stock~~-UTPs [LOC & PAS](#).

4.2.12.6. Electrical shore supply

Where provided, electrical shore supply shall be by means of one or more of the power supply systems specified in the ~~rolling-stock~~-UTPs [LOC & PAS](#).

4.3. Functional and technical specifications of the interfaces

From the standpoint of technical compatibility, the interfaces of the infrastructure subsystem with the other subsystems are like described in the following points.

4.3.1. Interfaces with the rolling stock subsystem

Table 15 Interfaces with the rolling stock subsystem, '~~TSI~~-UTP for locomotives and passenger rolling stock (UTP LOC&PAS)'

¹⁴ Council Directive 98/83/EC of 3 November 1998 on the quality of water intended for human consumption, Official Journal of the EU: OJ L 330, 5.12.1998, p. 32-54

Status: **DRAFT**

Version 1

Ref.: TECH-20021

Original: EN

Date: 19.05.2020

Interface	Reference Infrastructure UTP	Reference UTP for locomotives and passenger rolling stock
Track gauge	4.2.4.1 Nominal track gauge 4.2.5.1 Design geometry of switches and crossings 4.2.8.6 The immediate action limits for switches and crossings	4.2.3.5.2.1 Mechanical and geometrical characteristics of wheelset 4.2.3.5.2.3 Variable gauge wheelsets
Gauge	4.2.3.1 Structure gauge 4.2.3.2 Distance between track centres 4.2.3.5 Minimum radius of vertical curve 4.2.9.3 Platform offset	4.2.3.1. Gauging
Axle load and axle spacing	4.2.6.1 Track resistance to vertical loads 4.2.6.3 Lateral track resistance 4.2.7.1 Resistance of new bridges to traffic loads 4.2.7.2 Equivalent vertical loading for new earthworks and earth pressure effects imposed on new structures 4.2.7.4 Resistance of existing bridges and earthworks to traffic loads	4.2.2.10 Load conditions and weighed mass 4.2.3.2.1 Axle load parameter
Running characteristics	4.2.6.1 Track resistance to vertical loads 4.2.6.3 Lateral track resistance 4.2.7.1.4 Nosing forces	4.2.3.4.2.1 Limit values for running safely 4.2.3.4.2.2 Track loading limit values
Ride stability	4.2.4.4 Equivalent conicity 4.2.4.6 Railhead profile for plain line 4.2.11.2 Equivalent conicity in service	4.2.3.4.3 Equivalent conicity 4.2.3.5.2.2 Mechanical and geometrical characteristics of wheels
Longitudinal actions	4.2.6.2 Longitudinal track resistance 4.2.7.1.5 Actions due to traction and braking (longitudinal loads)	4.2.4.5 Braking performance
Minimum horizontal curve radius	4.2.3.4 Minimum radius of horizontal curve	4.2.3.6 Minimum curve radius Annex A, A.1 Buffers
Running dynamic behaviour	4.2.4.3 Cant deficiency	4.2.3.4.2. Running dynamic behaviour
Maximum deceleration	4.2.6.2 Longitudinal track resistance 4.2.7.1.5 Actions due to traction and braking	4.2.4.5 Braking performance



Status: **DRAFT**

Version 1

Ref.: TECH-20021


Original: EN

Date: 19.05.2020

Aerodynamic effect	4.2.3.2 Distance between track centres 4.2.7.3 Resistance of new structures over or adjacent to tracks 4.2.10.1 Maximum pressure variations in tunnels 4.2.10.3 Aerodynamic effect on ballasted track Ballast pick up	4.2.6.2.1 Slipstream effects on passengers on platforms and on trackside workers 4.2.6.2.2 Head pressure pulse 4.2.6.2.3 Maximum pressure variations in tunnels 4.2.6.2.5 Aerodynamic effect on ballasted tracks
Crosswind	4.2.10.2 Effect of crosswinds	4.2.6.2.4 Crosswind
Installations for servicing trains	4.2.12.2 Toilet discharge 4.2.12.3 Train external cleaning facilities 4.2.12.4 Water restocking 4.2.12.5 Refuelling 4.2.12.6 Electric shore supply	4.2.11.3 Toilet discharge system 4.2.11.2.2 Exterior cleaning through a washing plant 4.2.11.4 Water refilling equipment 4.2.11.5 Interface for water refilling 4.2.11.7 Refuelling equipment 4.2.11.6 Special requirements for stabling of trains

Table 16 Interfaces with the rolling stock subsystem, ‘UTP for freight wagons (UTP WAG)’

Interface	Reference Infrastructure UTP	Reference UTP for freight wagons
Track gauge	4.2.4.1 Nominal track gauge 4.2.4.6 Railhead profile for plain line 4.2.5.1 Design geometry of switches and crossings 4.2.8.6 The immediate action limits for switches and crossings	4.2.3.6.2 <i>Characteristics of wheelsets</i> 4.2.3.6.3 <i>Characteristics of wheels</i>
Gauge	4.2.3.1 Structure gauge 4.2.3.2 Distance between track centres 4.2.3.5 Minimum radius of vertical curve 4.2.9.3 Platform offset	4.2.3.1. <i>Gauging</i>
Axle load and axle spacing	4.2.6.1 Track resistance to vertical loads 4.2.6.3 Lateral track resistance 4.2.7.1 Resistance of new bridges to traffic loads 4.2.7.2 Equivalent vertical loading for new earthworks and earth pressure effects imposed on new structures	4.2.3.2 <i>Compatibility with load carrying capacity of lines</i>

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 39 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

	4.2.7.4 Resistance of existing bridges and earthworks to traffic loads	
Running dynamic behaviour	4.2.8 Immediate action limits on track geometry defects	4.2.3.5.2 <i>Running dynamic behaviour</i>
Longitudinal actions	4.2.6.2 Longitudinal track resistance 4.2.7.1.5 Actions due to traction and braking (longitudinal loads)	4.2.4.3.2 <i>Brake performance</i>
Minimum curve radius	4.2.3.4 Minimum radius of horizontal curve	4.2.2.1. <i>Mechanical interface</i>
Vertical curve	4.2.3.5 Minimum radius of vertical curve	4.2.3.1 <i>Gauging</i>
Crosswind	4.2.10.2 Effect of crosswinds	4.2.6.3- Cross wind

4.3.6.4.3.2. Interfaces with the energy subsystem

States shall ensure that the interfaces with the energy subsystem are managed.

Table 17 Interfaces with the energy subsystem


Interface	Reference Infrastructure TSI	Reference Energy TSI
Gauge	4.2.3.1 Structure gauge	4.2.10 Pantographs gauge

4.3.7.4.3.3. Interfaces with the control command and signalling subsystem

States shall ensure that the interfaces with the control command and signalling subsystem are managed.

Table 18 Interfaces with the control command and signalling subsystem

Interface	Reference Infrastructure TSI	Reference Control Command and Signalling TSI
Structure gauge set for CCS installations. Visibility of track- side CCS objects.	4.2.3.1 Structure gauge	4.2.5.2 Eurobalise communication (space for installation) 4.2.5.3 Euroloop communication (space for installation) 4.2.10 Train detection systems (space for installation) 4.2.15 Visibility of track-side control-command and signalling objects

 OTIF	SUBSYSTEM INFRASTRUCTURE		Page 40 of 106	
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

4.3.8.4.3.4. Interfaces with the operation and traffic management subsystem

States shall ensure that in accordance with UTP specifications, as far as these are available, operational measures are in place to manage the following interfaces between the infrastructure and the operation of trains:

- Ride stability with a view to the in-service equivalent conicity
- Use of eddy current brakes with a view to longitudinal track resistance and braking performance of trains
- Limiting the effect of crosswinds
- Operating rules
- Staff competences.


Table 19 Interfaces with the [operation and traffic management control-command and signalling](#) subsystem

Interface	Reference Infrastructure TSI	Reference Operation and Traffic Management TSI
Ride stability	4.2.11.2 Equivalent conicity in service	4.2.3.4.4. Operational quality
Use of eddy current brakes	4.2.6.2 Longitudinal track resistance	4.2.2.6.2 Braking performance
Crosswinds	4.2.10.2 Effect of crosswinds	4.2.3.6.3 Contingency arrangements
Operating rules	4.4 Operating rules	4.2.1.2.2.2 Modifications to information contained in the route book 4.2.3.6 Degraded operation
Staff competences	4.6 Professional competences	2.2.1 Staff and trains

4.4. Operating rules

(1) Operating rules are developed within the procedures described in the infrastructure manager's safety management system. These rules take into account the documentation related to operation which forms a part of the technical file as required in [Article 15\(4\) and set out in Annex IV \(point 2.4\) of Directive \(EU\) 2016/797](#)~~Article 18(3) and set out in Annex VI (point 1.2.4) of Directive 2008/57/EC.~~

(2) In certain situations involving pre-planned works, it may be necessary to temporarily suspend the specifications of the infrastructure subsystem and its interoperability constituents defined in sections 4 and 5 of this TSI.

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 41 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

4.5. Maintenance rules

~~Reserved~~

(1) Maintenance rules are developed within the procedures described in the infrastructure manager's safety management system.

(2) The maintenance file shall be prepared before placing a line into service as the part of the technical file accompanying the TSI declaration of verification.

(3) The maintenance plan shall be drawn up for the subsystem to ensure that the requirements set out in this TSI are maintained during its lifetime.

4.5.1. Maintenance file

Contracting States shall ensure that the entity responsible for the maintenance of infrastructure applies at least:

- a) a defined set of values for immediate action limits, related to track geometric quality and limits on isolated defects.
- a)b) pre-defined measures to be taken when the defined limits are not met (such measures could for example involve speed restriction and repair time).~~Reserved~~

A maintenance file shall contain at least:

- a) a set of values for immediate action limits,
- b) the measures taken (for example speed restriction, repair time) when prescribed limits are not met,

related to track geometric quality and limits on isolated defects.

4.5.2. Maintenance plan

Contracting States shall ensure that the entity responsible for the maintenance of infrastructure has a maintenance plan~~Reserved~~


The infrastructure manager shall have a maintenance plan ~~containing the items listed in point 4.5.1 together with at least the following items related to the same elements:~~

~~a set of values for intervention limits and alert limits,~~

~~a statement about the methods, professional competences of staff and personal protective safety equipment necessary to be used,~~

~~the rules to be applied for the protection of people working on or near the track,~~

~~the means used to check that in-service values are respected.~~

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 42 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

~~the measures taken, for speed greater than 250 km/h, to mitigate the risk of ballast pick up.~~

containing the items listed in point 4.5.1 together with at least the following:

- a) a set of values for intervention limits and alert limits,
- b) a statement about the methods, professional competences of staff and personal protective safety equipment necessary to be used,
- c) the rules to be applied for the protection of people working on or near the track,
- d) the means used to check that in-service values are respected;
- e) the measures taken, for speed greater than 250 km/h, to mitigate the risk of ballast pick up.

4.6. Professional qualifications

Reserved

The professional qualifications of staff required for operation and maintenance of the infrastructure subsystem are not set out in this TSI but are described in the infrastructure manager's safety management system.

4.7. Health and safety conditions

Reserved


(1) the health and safety conditions of staff required for the operation and maintenance of the infrastructure subsystem shall be compliant with the relevant European and national legislation~~The health and safety conditions of staff required for the operation and maintenance of the infrastructure subsystem shall be compliant with the relevant European and national legislation.~~

(2) The issue is covered by the procedures described in the infrastructure manager's safety management system.

5. INTEROPERABILITY CONSTITUENTS

5.1. Basis on which interoperability constituents have been selected

- (1) The requirements of point 5.3 are based on a traditional design of ballasted track with Vignole (flat-bottom) rail on concrete or wooden sleepers and fastening providing resistance to longitudinal slip by bearing on the rail foot.
- (2) Components and subassemblies used for the construction of other designs of track are not considered to be interoperability constituents.

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 43 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

5.2. List of constituents

- (1) For the purposes of this UTP, only the following elements, whether individual components or subassemblies of the track are declared to be ‘interoperability constituents¹⁵’:
 - a) the rail (5.3.1),
 - b) the rail fastening systems (5.3.2),
 - c) track sleepers (5.3.3).
- (2) The following points describe the specifications applicable to each of these constituents.
- (3) Rails, fastenings and sleepers used for short length of track for specific purposes, for example in switches and crossings, at expansion devices, transition slabs and special structures, are not considered to be interoperability constituents.

5.3. Constituents performances and specifications

5.3.1. The rail

The specifications of the ‘rail’ interoperability constituent concern the following parameters:

- a) railhead profile,
- b) rail steel.

5.3.1.1. Railhead profile

The rail head profile shall fulfil the requirements of point 4.2.4.6 ‘Railhead profile for plain line’.


5.3.1.2. Rail steel

- (1) The rail steel is relevant to the requirements of point 4.2.6 ‘Track resistance to applied loads’.
- (2) The rail steel shall meet the following requirements:
 - a) The rail hardness shall be at least 200 HBW.
 - b) The tensile strength shall be at least 680 MPa.
 - c) Minimum number of cycles at fatigue test without failure shall be at least 5×10^6 .

5.3.2. The rail fastening systems

- (1) The rail fastening system is relevant to the requirements of point 4.2.6.1 for ‘Track resistance to vertical loads’, point 4.2.6.2 for ‘Longitudinal track resistance’ and point 4.2.6.3 for ‘Lateral track resistance’.
- (2) The rail fastening system shall comply in laboratory test conditions with the following requirements:

¹⁵ Interoperability Constituents are defined in Article 2(g) of ATMF. The separate assessment of ICs is not mandatory in COTIF. In case the assessment of conformity of an IC is not done separately, it should take place together with the assessment of the subsystem.

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 44 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

a) the longitudinal force required to cause the rail to begin to slip (i.e. move in an inelastic way) through a single rail fastening assembly shall be at least 7 kN and for speeds of more than 250 km/h shall be at least 9 kN,

b) the rail fastening shall resist application of 3 000 000 cycles of the typical load applied in a sharp curve, such that the change in performance of the fastening system shall not exceed:

- 20 % in terms of clamping force,

- 25 % in terms of vertical stiffness,

- a reduction of more than 20 % in terms of and longitudinal restraint, is not degraded by more than 20 % and vertical stiffness is not degraded by more than 25 %.

The typical load shall be appropriate to:

- the maximum axle load the rail fastening system is designed to accommodate,
- the combination of rail, rail inclination, rail pad and type of sleepers with which the fastening system may be used.

5.3.3. Track sleepers

- (1) Track sleepers shall be designed such that when they are used with a specified rail and rail fastening system they will have properties that are consistent with the requirements of point 4.2.4.1 for ‘Nominal track gauge’, point 4.2.4.7 for ‘Rail inclination’ and point 4.2.6 for ‘Track resistance to applied loads’.
- (2) For the nominal track gauge system of 1 435 mm, the design track gauge for track sleepers shall be 1 437 mm.

6. ASSESSMENT OF CONFORMITY OF INTEROPERABILITY CONSTITUENTS AND OF THE SUBSYSTEM

The admission of infrastructure is subject to the provisions in force in the state in which the infrastructure is located (see Article 8 § 2 of the ATMF UR).


Conformity assessment responsibilities and procedures, including declarations, are therefore excluded from this UTP.

Contracting States shall ensure that persons involved in the assessment of conformity possess adequate qualifications. Contracting States are recommended to apply the criteria defined in UTP GEN-E for this purpose.

AND EC VERIFICATION OF THE SUBSYSTEMS

Modules for the procedures for assessment of conformity, suitability for use and EC verification are defined in Article 8 of this Regulation¹⁶.

¹⁶ COMMISSION REGULATION (EU) No 1299/2014 of 18 November 2014 on the technical specifications for interoperability relating to the ‘infrastructure’ subsystem of the rail system in the European Union

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 45 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

6.1. Interoperability constituents

6.1.1. Conformity assessment procedures

~~Reserved~~ Unless specified otherwise, the assessment of conformity is subject to the rules applicable in the state concerned.

(1) The conformity assessment procedure of interoperability constituents as defined in section 5 of this TSI shall be carried out by application of the relevant modules.

(2) Serviceable interoperability constituents that are suitable for reuse are not subject to the conformity assessment procedures.

6.1.2. Application of modules

Reserved


(1) The following modules for conformity assessment of interoperability constituents are used:

- a) CA ‘Internal production control’
- b) CB ‘Type examination’
- c) CC ‘Conformity to type based on internal production control’
- d) CD ‘Conformity to type based on quality management system of the production process’
- e) CF ‘Conformity to type based on product verification’
- f) CH ‘Conformity based on full quality management system’

(2) The modules for conformity assessment of interoperability constituents shall be chosen from those shown in Table 20.

Table 20 Modules for conformity assessment to be applied for interoperability constituents

Rail	Rail fastening system	Track sleepers	Procedures
CA or CH	CA or CH		Placed on the EU market before entry into force of relevant TSIs

 OTIF	SUBSYSTEM INFRASTRUCTURE		Page 46 of 106	
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

CB + CC or CB + CD or CB + CF or CH		Placed on the EU market after entry into force of relevant TSIs
--	--	---

(3) In the case of products placed on the market before the publication of relevant TSIs, the type is considered to have been approved and therefore EC type examination (module CB) is not necessary, provided that the manufacturer demonstrates that tests and verification of interoperability constituents have been considered successful for previous applications under comparable conditions and are in conformity with the requirements of this TSI. In this case these assessments shall remain valid in the new application. If it is not possible to demonstrate that the solution is positively proven in the past, the procedure for interoperability constituents placed on the EU market after publication of this TSI applies.

(4) The conformity assessment of interoperability constituents shall cover the phases and characteristics as indicated in Table 36 of Appendix A to this TSI.

6.1.3. Innovative solutions for interoperability constituents

If an innovative solution is proposed for an interoperability constituent, the procedure described

below shall apply:

In order to keep pace with technological progress, innovative solutions may be required, which do not comply with the specifications set out in this UTP. In that case, new specifications associated with those innovative solutions shall be developed.

Innovative solutions may be related to the infrastructure subsystem, its parts and its ICs.

If an innovative solution is proposed, the manufacturer or his authorised representative shall declare how it deviates from or complements the relevant provisions of this UTP and submit the deviations to the Competent Authority of the State

in Article 10¹⁷ shall apply.


Article 10, Innovative solutions

1. In order to keep pace with technological progress, innovative solutions may be required, which do not comply with the specifications set out in the Annex or for which the assessment methods set out in the Annex cannot be applied.

2. Innovative solutions may relate to the infrastructure subsystem, its parts and its interoperability constituents.

3. If an innovative solution is proposed, the manufacturer or his authorised representative established within the Union shall declare how it deviates from or complements to the relevant provisions of this TSI and submit the deviations to the Commission for analysis. The Commission may

¹⁷ COMMISSION REGULATION (EU) No 1299/2014 of 18 November 2014 on the technical specifications for interoperability relating to the 'infrastructure' subsystem of the rail system in the European Union

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 47 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

where the infrastructure is located. If the Competent Authority is of the opinion that the UTP should be modified in order to take the innovative solution into account, it shall submit its proposal to the Committee of Technical Experts (CTE).

If the CTE supports the opinion, the appropriate functional and interface specifications, which need to be included in the UTP in order to allow the use of this innovative solution, shall be developed and subsequently integrated in the UTP during their respective revision processes.

request the opinion of the Agency on the proposed innovative solution.

4. The Commission shall deliver an opinion on the proposed innovative solution. If this opinion is positive, the appropriate functional and interface specifications and the assessment method, which need to be included in the TSI in order to allow the use of this innovative solution, shall be developed and subsequently integrated in the TSI during the revision process pursuant to Article 6 of Directive 2008/57/EC. If the opinion is negative, the innovative solution proposed cannot be used.

5. Pending the review of the TSI, the positive opinion delivered by the Commission shall be considered as an acceptable means of compliance with the essential requirements of Directive 2008/57/EC and may be used for the assessment of the subsystem.

6.1.4. Declaration of conformity for interoperability constituents


6.1.4.1. Reserved

Interoperability constituents subject to other European Union Directives

(1) in accordance with Article 10 (3) of Directive (EU) 2016/797, for ~~Article 13(3) of Directive 2008/57/EC, states~~ ‘Where the interoperability constituents that are the subject of other legal acts of the Union covering other matters, Community Directives covering other aspects, the EC declaration of conformity or suitability for use shall, ~~in such instances,~~ state that the interoperability constituents also meet the requirements of those other ~~Directives.~~legal acts;

(2) in accordance with Annex I to Commission Implementing Regulation (EU) 2019/250¹⁸, ~~According to Annex IV of Directive 2008/57/EC,~~ the EC declaration of conformity or suitability for use shall include a list of restrictions or ~~be accompanied by the statement setting out the~~ condition of use.

¹⁸ [Commission Implementing Regulation \(EU\) 2019/250 of 12 February 2019 on the templates for “EC” declarations and certificates for railway interoperability constituents and subsystems, on the model of declaration of conformity to an authorised railway vehicle type and on the “EC” verification procedures for subsystems in accordance with Directive \(EU\) 2016/797 of the European Parliament and of the Council and repealing Commission Regulation \(EU\) No 201/2011 \(OJ L 42, 13.2.2019, p. 9\)](#)

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 48 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

6.1.4.2. Declaration of conformity for rails

Reserved

No statement setting out the conditions of use is required.

6.1.4.3. Declaration of conformity for rail fastening systems

Reserved

The declaration of conformity shall be accompanied by statement setting out:

- a) the combination of rail, rail inclination, rail pad and type of sleepers with which the fastening system may be used,
- b) the maximum axle load the rail fastening system is designed to accommodate.

6.1.4.4. Declaration of conformity for track sleepers

Reserved

The declaration of conformity shall be accompanied by statement setting out:

- a) the combination of rail, rail inclination and type of rail fastening system with which the sleeper may be used,
- b) the nominal and design track gauge,
- c) the combinations of axle load and train speed the track sleeper is designed to accommodate.


6.1.5. Particular assessment procedures for interoperability constituents

Particular assessment procedures, described in point 6.1.5.1 below, fall within the scope of this UTP. These procedures are necessary to ensure that conformity assessment of parameters in this UTP is carried out in a harmonised manner.

6.1.5.1. Assessment of rails

Assessment of rail steel shall be done according to the following requirements:

- a) Rail hardness shall be tested for position RS according to EN 13674-1:2011 paragraph 9.1.8, measured using one specimen (control sample out of production).
- b) Tensile strength shall be tested according to EN 13674-1:2011 paragraph 9.1.9, measured using one specimen (control sample out of production).
- c) Fatigue test shall be done according to EN 13674-1:2011 paragraph 8.1 and paragraph 8.4.

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 49 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

6.1.5.2. Assessment of sleepers

Reserved

(1) Until 31 May 2021 a design track gauge for track sleepers below 1 437 mm shall be allowed.

(2) For polyvalent gauge and multiple gauge track sleepers it is allowed not to assess the design track gauge for the nominal track gauge of 1 435 mm.

6.2. Infrastructure subsystem

6.2.1. General provisions

Unless specified otherwise, the assessment of conformity is subject to the rules applicable in the state concerned. ~~Reserved~~

(1) At the request of the applicant, the notified body carries out the EC verification of the infrastructure subsystem in accordance with [Article 15 of Directive \(EU\) 2016/797](#) ~~Article 18 of Directive 2008/57/EC~~ and in accordance with the provisions of the relevant modules.


(2) If the applicant demonstrates that tests or assessments of an infrastructure subsystem or parts of the subsystem are the same as have been successful for previous applications of a design, the notified body shall consider the results of these tests and assessments for the EC verification.

(3) The EC verification of the infrastructure subsystem shall cover the phases and characteristics indicated in Table 37 in Appendix B to this TSI.

(4) Performance parameters as set out in point 4.2.1 of this TSI are not subject to the EC verification of the subsystem.

(5) Particular assessment procedures for specific basic parameters of infrastructure subsystem are set out in point 6.2.4.

(6) The applicant shall draw up the EC declaration of verification for the infrastructure subsystem in accordance with [Article 15 of Directive \(EU\) 2016/797](#) ~~Article 18 and Annex V of Directive 2008/57/EC~~.

 OTIF	SUBSYSTEM INFRASTRUCTURE INFRASTRUCTURE			Page 50 of 106
	Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN

6.2.2. Application of modules

Reserved

For the EC verification procedure of the infrastructure subsystem, the applicant may choose either:

- a) Module SG: EC verification based on unit verification, or
- b) Module SH1: EC verification based on full quality management system plus design examination.

6.2.2.1. Application of module SG

In the case where EC verification is most effectively undertaken by using information collected by the infrastructure manager, contracting entity or the main contractors involved (for example data obtained using track recording vehicle or other measuring devices), the notified body shall take this information into account to assess conformity.

6.2.2.2. Application of module SH1

The SH1 module may be chosen only where the activities contributing to the proposed subsystem to be verified (design, manufacturing, assembling, installation) are subject to a quality management system for design, production, final product inspection and testing, approved and surveyed by a notified body.

6.2.3. Innovative solutions


If an innovative solution is proposed for the infrastructure subsystem, the procedure described in

6.1.3 of this UTP shall apply.

Article 10 shall apply.

6.2.4. Particular assessment procedures for infrastructure subsystem

Particular assessment procedures, as described under points 6.2.4.1 to 6.2.4.12, fall within the scope of this UTP. These procedures are necessary to ensure that conformity assessment of parameters in this UTP is carried out in a harmonised manner.


 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 51 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

6.2.4.1. Assessment of Structure gauge

- (1) Assessment of structure gauge as a design review shall be done against characteristic cross sections using the results of calculations made by infrastructure manager or the contracting entity on the basis of sections 5, 7, 10, Annex C and point D.4.8 of Annex D of EN 15273-3:2013.
- (2) Characteristic cross sections are:
 - a) track without cant,
 - b) track with maximum cant,
 - c) track with a civil engineering structure over the line
 - d) any other location where the designed installation limit gauge is approached by less than 100 mm or the installation nominal gauge or uniform gauge is approached by less than 50 mm.
- (3) After assembly before putting into service clearances shall be verified at locations where the designed installation limit gauge is approached by less than 100 mm or the installation nominal gauge or uniform gauge is approached by less than 50 mm.
- (4) Instead of point (1), for the 1 520 mm track gauge system assessment of structure gauge as a design review is to be made against characteristic cross sections using the uniform structure gauge 'S' as defined in Appendix H to this UTP.
- (5) Instead of point (1), for the 1 600 mm track gauge system assessment of structure gauge as a design review is to be made against characteristic cross sections using the structure gauge 'IRL1' as defined in Appendix O to this UTP.

6.2.4.2. Assessment of distance between track centres

- (1) A design review for assessment of the distance between track centres shall be done using the results of calculations made by the Infrastructure Manager or the contracting entity on the basis of chapter 9 of EN 15273-3:2013. The nominal distance between track centres shall be checked at the line layout where distances are given in parallel to the horizontal plane. The limit installation distance between track centres shall be checked with the radius and relevant cant.
- (2) After assembly before putting into service, distance between track centres shall be verified at critical locations where the limit installation distance between track centres as defined according chapter 9 of EN 15273-3:2013 is approached by less than 50 mm.
- (3) Instead of point (1), for the 1 520 mm track gauge system a design review for assessment of the distance between track centres is to be made using the results of calculations made by the infrastructure manager or the contracting entity. The nominal distance between track centres shall be checked at the line layout where distances are given in parallel to the horizontal plane. The limit installation distance between track centres shall be checked with the radius and relevant cant.
- (4) Instead of point (2), for the 1 520 mm track gauge system after assembly before putting into service, distance between track centres shall be verified at critical locations where the limit installation distance between track centres is approached by less than 50 mm.

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 52 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

6.2.4.3. Assessment of nominal track gauge

Reserved

(1) Assessment of the nominal track gauge at design review shall be done by checking the self-declaration of the applicant.

(2) Assessment of the nominal track gauge at assembly before putting into service shall be done by checking the interoperability constituent sleeper's certificate. For non-certified interoperability constituents assessment of the nominal track gauge shall be done by checking the self-declaration of the applicant.

6.2.4.4. Assessment of track layout

- (1) At design review the curvature, cant, cant deficiency and abrupt change of cant deficiency shall be assessed against the local design speed.
- (2) Assessment of switches and crossings layout is not required.

6.2.4.5. Assessment of cant deficiency for trains designed to travel with higher cant deficiency

Point 4.2.4.3(2) states that 'It is permissible for trains specifically designed to travel with higher cant deficiency (for example multiple units with lower axle loads; vehicles with special equipment for the negotiation of curves) to run with higher cant deficiency values, subject to a demonstration that this can be achieved safely'.


This demonstration is outside the scope of this TSI and thus not subject to a notified body verification of the infrastructure subsystem. The demonstration shall be undertaken by the RU, if necessary in cooperation with the IM.

6.2.4.6. Assessment of design values for equivalent conicity

Assessment of design values for equivalent conicity shall be done using the results of calculations made by the infrastructure manager or the contracting entity on the basis of EN 15302:2008+A1:2010.

6.2.4.7. Assessment of railhead profile

- (1) The design profile of new rails shall be checked against point 4.2.4.6.
- (2) Reused serviceable rails shall not be subject to the requirements for railhead profile as set out in point 4.2.4.6.

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 53 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

6.2.4.8. Assessment of switches and crossings

Reserved

Assessment of switches and crossings related to points 4.2.5.1 to 4.2.5.3 shall be done by checking that a self-declaration of the infrastructure manager or contracting entity exists.

6.2.4.9. Assessment of new structures, earthworks and earth pressure effects

- (1) Assessment of new structures shall be done by checking the traffic loads and the track twist limit used for design against the minimum requirements of points 4.2.7.1 and 4.2.7.3.

The notified body is not required to review the design nor carry out any calculations.


When reviewing the value of factor alpha used in the design according to point 4.2.7.1 it is only necessary to check that the value of factor alpha satisfies Table 11.

- (2) Assessment of new earthworks and earth pressure effects shall be done by checking the vertical loads used for design according to requirements of point 4.2.7.2. When reviewing the value of factor alpha used in the design according to point 4.2.7.2 it is only necessary to check that the value of factor alpha satisfies Table 11.

The notified body is not required to review the design nor carry out any calculations.

6.2.4.10. Assessment of existing structures

- (1) Assessment of existing structures against the requirements of point 4.2.7.4(3) (b) and (c) shall be done by one of the following methods:
- a) check that the values of EN line categories, in combination with the allowed speed published or intended to be published for the lines containing the structures, is in line with the requirements of Appendix E of this UTP,
 - b) check that the values of EN line categories, in combination with the allowed speed specified for the structures or for the design, is in line with the requirements of Appendix E of this UTP,
 - c) check the traffic loads specified for the structures or for the design against the minimum requirements of points 4.2.7.1.1 and 4.2.7.1.2. When reviewing the value of factor alpha according to point 4.2.7.1.1 it is only necessary to check that the value of factor alpha is in line with the value of factor alpha mentioned in Table 11.
- (2) It is not required to review the design nor carry out any calculations.
- (3) For existing structures assessment point 4.2.7.4(4) applies respectively.

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 54 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

6.2.4.11. Assessment of platform offset

- (1) Assessment of the distance between the track centre and the platform edge as a design review shall be done using the results of calculations made by the Infrastructure Manager or the contracting entity on the basis of chapter 13 of EN 15273-3:2013.
- (2) After assembly before putting into service clearances shall be verified. The offset is checked at the ends of the platform and every 30 m in straight track and every 10 m in curved track.
- (3) Instead of point (1), for the 1 520 mm track gauge system assessment of the distance between the track centre and the platform edge as a design review shall be done against requirements of point 4.2.9.3. Point (2) applies accordingly.
- (4) Instead of point (1), for the 1 600 mm track gauge system assessment of the distance between the track centre and the platform edge as a design review shall be done against requirements of point 4.2.9.3(4). Point (2) applies accordingly.

6.2.4.12. Assessment of maximum pressure variations in tunnels

- (1) Assessment of maximum pressure variation in the tunnel (10 kPa criterion) shall be done using the results of numerical simulations according to chapters 4 and 6 of EN 14067-5:2006+A1:2010 made by the infrastructure manager or the contracting entity on the basis of all expected operational conditions with the trains complying with the UTP for locomotives and passenger rolling stock and intended to run at speeds greater than or equal to 200 km/h in the specific tunnel to be assessed.
- (2) The input parameters to be used are to be such that the reference characteristic pressure signature of the trains set out in the UTP for locomotives and passenger rolling stock is fulfilled.
- (3) The reference cross section areas of the interoperable trains (constant along a train) to be considered is to be, independently to each motor or trailer vehicle:
 - a) 12 m² for vehicles designed for GC and DE3 reference kinematic profile,
 - b) 11 m² for vehicles designed for GA and GB reference kinematic profile,
 - c) 10 m² for vehicles designed for G1 reference kinematic profiles.


The vehicle gauge to be considered shall be set on the basis of the gauges selected according to point 4.2.1.

- (4) The assessment may take into account construction features which reduce the pressure variation if any, as well as the tunnel length.
- (5) The pressure variations due to atmospheric or geographical conditions can be neglected.

6.2.4.13. Assessment of effect of crosswinds

Reserved

This demonstration of the safety is outside the scope of this TSI and thus not subject to a notified body verification. The demonstration shall be undertaken by the infrastructure

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 55 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

manager, if necessary in cooperation with the railway undertaking.

6.2.4.14. Assessment of fixed installations for servicing trains

Reserved

Assessment of fixed installations for servicing trains is in the responsibility of the Member State concerned.

[6.2.4.15. Assessment of compatibility with braking systems](#)

[The assessment of the requirements laid down in point 4.2.6.2.2\(2\) is not required.](#)

6.2.5. Technical solutions giving presumption of conformity at design stage

The admission of infrastructure is not in the scope of COTIF and this UTP should not therefore stipulate binding provisions concerning the responsibilities and procedures for conformity assessment. The provisions in point 6.2.5 are therefore recommended best practices.


Presumption of conformity at design stage for technical solutions may be assessed prior and independent from a specific project.

6.2.5.1. Assessment of track resistance for plain line

- (1) The demonstration of conformity of the track to the requirements of point 4.2.6 may be done by reference to an existing track design which meets the operating conditions intended for the subsystem concerned.
- (2) A track design shall be defined by the technical characteristics as set out in Appendix C.1 to this TSI and by its operating conditions as set out in Appendix D.1 to this UTP.
- (3) A track design is considered to be existing, if both of the following conditions are met:
 - a) the track design has been in normal operation for at least one year and
 - b) the total tonnage over the track was at least 20 million gross tons for the period of normal operation.
- (4) The operating conditions for an existing track design refer to conditions which have been applied in normal operation.
- (5) The assessment to confirm an existing track design shall be performed by checking that the technical characteristics as set out in Appendix C.1 to this UTP and conditions of use as set out in Appendix D.1 to this UTP are specified and that the reference to the previous use of the track design is available.
- (6) When a previously assessed existing track design is used in a project,

the conditions of use should be the same.

the notified body shall only assess that the conditions of use are respected.

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 56 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

- (7) For new track designs that are based on existing track designs, a new assessment can be performed by verifying the differences and evaluating their impact on the track resistance. This assessment may be supported for example by computer simulation or by laboratory or in situ testing.
- (8) A track design is considered to be new, if at least one of the technical characteristics set out in Appendix C to this UTP or one of conditions of use set out in Appendix D to this UTP is changed.

6.2.5.2. Assessment for switches and crossing

- (1) The provisions as set out in point 6.2.5.1 are applicable for the assessment of track resistance for switches and crossings. Appendix C.2 sets out the technical characteristics of switches and crossings design and Appendix D.2 sets out the conditions of use of switches and crossings design.
- (2) Assessment of design geometry of switches and crossings shall be done according to point 6.2.4.8 of this UTP.
- (3) Assessment of maximum unguided length of fixed obtuse crossings shall be done according to point 6.2.4.8 of this UTP.

6.3. Verification when speed is used as a migration criterion


- (1) Point 7.5 allows a line to be put into service at a lower speed than the ultimate intended speed. This point sets out requirements for UTP verification procedure in this case.
- (2) Some limiting values set out in section 4 depend on the intended speed of the route. Conformity should be assessed at the intended ultimate speed; however it is permissible to assess speed dependant characteristics at the lower speed at the time of placing in service.
- (3) The conformity of the other characteristics for the intended speed of the route remains valid.

(4) To declare the interoperability at this intended speed, it is only necessary to assess the conformity of the characteristics temporarily not respected, when they are brought up to the required level.

6.4. Assessment of maintenance file

Reserved

- (1) Point 4.5 requires the infrastructure manager to have for each interoperable line a maintenance file for the infrastructure subsystem.
- (2) The notified body shall confirm that the maintenance file exists and contains the items listed in point 4.5.1. The notified body is not responsible for assessing the suitability of the detailed requirements set out in the maintenance file.

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 57 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

(3) The notified body shall include a reference to the maintenance file required by point 4.5.1 of this TSI in the technical file referred to in Article [15\(4\) of Directive \(EU\) 2016/797](#)~~18(3) of Directive 2008/57/EC~~.

6.5. Subsystems containing interoperability constituents not holding an EC declaration

6.5.1. Conditions

Reserved

(1) Until 31 May 2021, a notified body is allowed to issue an EC certificate of verification for a subsystem even if some of the interoperability constituents incorporated within the subsystem are not covered by the relevant EC declarations of conformity and/or suitability for use according to this TSI, if the following criteria are complied with:

- a) the conformity of the subsystem has been checked against the requirements of section 4 and in relation to sections 6.2 to 7 (except point 7.7 ‘Specific Cases’) of this TSI by the notified body. Furthermore the conformity of the ICs to section 5 and 6.1 does not apply, and
- b) the interoperability constituents, which are not covered by the relevant EC declaration of conformity and/or suitability for use, have been used in a subsystem already approved and put in service in at least one of the Member State before the entry in force of this TSI.


(2) EC Declarations of conformity and/or suitability for use shall not be drawn up for the interoperability constituents assessed in this manner.

6.5.2. Documentation

Reserved

(1) The EC certificate of verification of the subsystem shall indicate clearly which interoperability constituents have been assessed by the notified body as part of the subsystem verification.

(2) The EC declaration of verification of the subsystem shall indicate clearly:

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 58 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

- a) Which interoperability constituents have been assessed as part of the subsystem;
- b) Confirmation that the subsystem contains the interoperability constituents identical to those verified as part of the subsystem;
- c) For those interoperability constituents, the reason(s) why the manufacturer did not provide an EC Declaration of conformity and/or suitability for use before its incorporation into the subsystem, including the application of national rules notified under Article [14 of Directive \(EU\) 2016/797](#)~~47~~ ~~of Directive 2008/57/EC~~.

6.5.3. Maintenance of the subsystems certified according to 6.5.1.

Reserved

(1) During and after the transition period and until the subsystem is upgraded or renewed (taking into account the decision of Member State on application of TSIs), the interoperability constituents which do not hold an EC Declaration of conformity and/or suitability for use and are of the same type are allowed to be used as maintenance related replacements (spare parts) for the subsystem, under the responsibility of the body responsible for maintenance.


(2) In any case the body responsible for maintenance must ensure that the components for maintenance related replacements are suitable for their applications, are used within their area of use and enable interoperability to be achieved within the rail system while at the same time meeting the essential requirements. Such components must be traceable and certified in accordance with any national or international rule or any code of practice widely acknowledged in the railway domain.

6.6. Subsystem containing serviceable interoperability constituents that are suitable for reuse

6.6.1. Conditions

Reserved

(1) A notified body is allowed to issue an EC certificate of verification for a subsystem even

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 59 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

if some of the interoperability constituents incorporated within the subsystem are serviceable interoperability constituents that are suitable for reuse, if the following criteria are complied with:

- a) the conformity of the subsystem has been checked against the requirements of section 4 and in relation to sections 6.2 to 7 (except point 7.7 “Specific Cases”) of this TSI by the notified body. Furthermore the conformity of the ICs to 6.1 does not apply, and
- b) the interoperability constituents are not covered by the relevant EC declaration of conformity and/or suitability for use.

(2) EC declarations of conformity and/or suitability for use shall not be drawn up for the interoperability constituents assessed in this manner.

6.6.2. Documentation

Reserved

(1) The EC certificate of verification of the subsystem shall indicate clearly which interoperability constituents have been assessed by the notified body as part of the subsystem verification.

(2) The EC declaration of verification of the subsystem shall indicate clearly:


- a) Which interoperability constituents are serviceable interoperability constituents that are suitable for reuse;
- b) Confirmation that the subsystem contains the interoperability constituents identical to those verified as part of the subsystem.

6.6.3. Use of serviceable interoperability constituents in maintenance

Reserved

(1) Serviceable interoperability constituents that are suitable for reuse are allowed to be used as maintenance related replacements (spare parts) for the subsystem, under the responsibility of the body responsible for maintenance.

(2) In any case the body responsible for maintenance must ensure that the components

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 60 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

for maintenance related replacements are suitable for their applications, are used within their area of use, and enable interoperability to be achieved within the rail system while at the same time meeting the essential requirements. Such components must be traceable and certified in accordance with any national or international rule, or any code of practice widely acknowledged in the railway domain.

7. IMPLEMENTATION OF THE UTP INFRASTRUCTURE

See point 1.2. for the scope of application.

Contracting States shall publish a list of lines to which this UTP is applicable, indicating for each line whether it fully complies with the technical provisions of this UTP. Non-compliance shall be identified, where possible indicating the characteristics of the line which deviate from the UTP provisions and where these deviations occur. Stations where lines with different characteristics come together shall be indicated.

Member States shall develop a national plan for the implementation of this TSI, considering the coherence of the entire rail system of the European Union. This plan shall include all projects [regarding new, subject to renewal and upgrading](#) of infrastructure subsystems, in line with the details mentioned in points 7.1 to 7.7 here below.

7.1. Application of this UTP to railway lines

Reserved

Sections 4 to 6 and any specific provisions in points 7.2 to 7.6 here below apply in full to the lines within the geographical scope of this TSI, which will be placed in service as interoperable lines after this TSI enters into force.


7.2. Application of this UTP to new railway lines

Reserved

(1) For the purpose of this TSI a ‘new line’ means a line that creates a route where none currently exists.

(2) The following situations, for example to increase speed or capacity, may be considered as an upgraded line rather than a new line:

- a) the realignment of part of an existing route,
- b) the creation of a bypass,
- c) the addition of one or more tracks on an existing route, regardless of the distance between the original tracks and the additional tracks.

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 61 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

7.3. Application of this UTP to existing railway lines

7.3.1. Upgrading or renewal of a line

(1) In accordance with

Article 2 (gg) of ATMF,

Article 2—(~~m~~14) of Directive (EU) 2016/797~~2008/57/EC~~,

“~~upgrading~~”² means any major modification work on a subsystem or part of it which results in a change in the technical file

relating to the subsystem,

accompanying the “EC” declaration of verification,

if that technical file exists, and ~~a subsystem~~ which improves the overall performance of the subsystem.

(2) The infrastructure subsystem of a line is considered to be upgraded in the context of this UTP when at least the performance parameters axle load or gauge, as defined in point 4.2.1, are ~~changed~~ improved in order to meet the requirements of another traffic code.

(3) In accordance with

Article 2 (y) of ATMF,

Article 2(15) of Directive (EU) 2016/797,

“renewal” means any major substitution work on a subsystem or part of it which does not change the overall performance of the subsystem.

(4) For this purpose, major substitution should be interpreted as a project undertaken to systematically replace elements of a line or a section of a line. Renewal differs from a substitution in the framework of maintenance,

referred to in point 7.3.3 below,

since it gives the opportunity to achieve a UTP compliant line. A renewal is the same case as upgrading, but without a change in performance parameters.

(5) The scope of the upgrading or renewal of the infrastructure subsystem may cover the entire subsystem on a given line or only certain parts of the subsystem.

According to Article 18(6) of Directive (EU) 2016/797, the national safety authority shall examine the project and decide whether a new authorisation for placing in service is needed.

(6) Reserved

Where a new authorisation is required, parts of the infrastructure subsystem falling under the scope of the upgrading or renewal shall comply with this TSI and shall be subject to the procedure established in Article 15 of Directive (EU) 2016/797, unless a permission for non-



(7) Reserved

application of TSI is granted according to Article 7 of Directive (EU) 2016/797.

Where a new authorisation for placing in service is not required, compliance with this TSI is recommended. Where compliance is not possible, the contracting entity shall inform the Member State of the reasons thereof.

~~For other UTP performance parameters,~~

~~according to Article 20 (1) of the Directive 2008/57/EC,~~

~~Contracting States decide to what extent the UTP needs to be applied to the project.~~

~~(8) Reserved~~

~~Where Article 20 (2) of the Directive 2008/57/EC applies because the upgrading is subject of an authorisation of placing into service, Member States shall decide which requirements of the TSI must be applied.~~

~~(9) Reserved~~

~~Where Article 20 (2) of the Directive 2008/57/EC does not apply because the upgrading is not subject of an authorisation of placing into service, compliance with this TSI is recommended. Where compliance is not possible to reach, the contracting entity shall inform the Member State of the reasons thereof.~~

~~(10) Reserved~~

~~(For a project including elements not being TSI compliant, the procedures for the assessment of conformity and EC verification to be applied should be agreed with the Member State.~~

7.3.2. Renewal of a line(Reserved)

~~(1) In accordance with~~

~~Article 2 (y) of ATMF,~~

~~Article 2 (n) of Directive 2008/57/EC,~~

~~‘renewal’ means any major substitution work on a subsystem or part subsystem which does not change the overall performance of the subsystem.~~

~~(2) For this purpose major substitution should be interpreted as a project undertaken to systematically replace elements of a line or a section of a line. Renewal differs from a substitution in the framework of maintenance, referred to in point 7.3.3 below, since it gives the opportunity to achieve a UTP compliant route. A renewal is the same case as upgrading, but without a change in performance parameters.~~



Status: DRAFT

Version 1

Ref.: TECH-20021

Original: EN

Date: 19.05.2020

~~(3) Contracting States shall decide which requirements of the UTP must be applied.~~

~~(4) Reserved~~

~~(5) Reserved~~

~~Where article 20(2) of Directive 2008/57/EC applies because the renewal is subject of an authorisation of placing into service, Member States shall decide which requirements of the TSI must be applied.~~

~~Where article 20(2) of Directive 2008/57/EC does not apply because the renewal is not subject of an authorisation of placing into service, the conformity with this TSI is recommended. Where compliance is not possible to reach, the contracting entity informs the Member State of the reasons thereof.~~

~~For a project including elements not being TSI compliant, the procedures for the assessment of conformity and EC verification to be applied should be agreed with the Member State.~~

7.3.3. Substitution in the framework of maintenance

Reserved


(1) Where the parts of a subsystem on a line are maintained, the formal verification and authorisation for placing into service is not required in accordance with this TSI. However, maintenance replacements should be, as far as it is reasonably practicable, undertaken in accordance with the requirements of this TSI.

(2) The objective should be that maintenance replacements progressively contribute the development of an interoperable line.

(3) In order to bring progressively an important part of the infrastructure subsystem in a process towards interoperability, the following group of basic parameters should be adapted together:

- a) Line layout,
- b) Track parameters,
- c) Switches and crossings,
- d) Track resistance to applied loads,
- e) Structures resistance to traffic loads,
- f) Platforms.

(4) In such cases, it is noted that each of the above elements taken separately cannot ensure compliance of the whole subsystem. The conformity of a subsystem can only be stated when all the elements are compliant with the

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 64 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

~~TSI~~In such cases, it is noted that each of the above elements taken separately cannot ensure compliance of the whole subsystem. The conformity of a subsystem can only be stated when all the elements are compliant with the TSI.

~~7.3.3.~~7.3.4. Existing lines that are not subject to a renewal or upgrading project

The demonstration of the level of compliance of existing lines with the basic parameters of the UTP is voluntary.

The procedure for this demonstration shall be in accordance with Commission Recommendation 2014/881/EU of 18 November 2014.

7.4. Application of this UTP to existing platforms

In case of upgrade or renewal of the infrastructure subsystem, the following conditions related to platform height governed by point 4.2.9.2 of this UTP, shall apply:

- a) It shall be allowed to apply other nominal platform heights for consistency with a particular upgrade or renewal programme of a line or a section of a line.
- b) It shall be allowed to apply other nominal platform heights, if the work requires structural alterations to any load bearing element.

7.5. Speed as an implementation criterion

- (1) It is permissible to bring a line into service as an interoperable line at a lower speed than its intended ultimate line speed. However, when it is the case the line should not be constructed in a way that inhibits future adoption of the intended ultimate line speed.
- (2) For example the distance between track centres shall be suitable for the intended ultimate line speed but the cant will need to be appropriate to the speed at the time the line is brought into service.
- (3) Requirements for assessment of conformity in this case are set out in section 6.3.

7.6. Route compatibility checks before the use of authorised vehicles~~Ascertain Compatibility of infrastructure and rolling stock after admission of rolling stock~~

The procedure to be applied and the parameters of the infrastructure subsystem to be used by the railway undertaking, for the purpose of route compatibility check are described in

UTP TCRC, concerning train composition and route compatibility .

point 4.2.2.5 and appendix D1 of the Annex to Commission Implementing Regulation (EU) 2019/773¹⁹.

¹⁹ Commission Implementing Regulation (EU) 2019/773 of 16 May 2019 on the technical specification for interoperability relating to the operation and traffic management subsystem of the rail system within the European Union and repealing Decision 2012/757/EU (OJ L 139 I, 27.5.2019, p. 5)

Status: **DRAFT**

Version 1

Ref.: TECH-20021

Original: EN

Date: 19.05.2020

- ~~(1) Rolling stock complying with the UTPs rolling stock is not automatically compatible with all lines complying with this UTP Infrastructure. For example, a GC gauge vehicle is not compatible with a GB gauge tunnel. The process of ascertaining route compatibility to be followed shall be in accordance with the provisions in force in the state concerned.~~
- ~~Contracting States shall ensure that procedures, to be applied by railway undertakings, are established for checking route compatibility between vehicles in international traffic and the lines on which this UTP is applicable.~~
- ~~These procedures shall comply with the provisions laid down in ATMF, in particular those of Article 6 § 2, Article 9 and Article 15a.~~
- ~~These procedures shall comply with UTP requirements where they exist.~~
- ~~Commission Recommendation on the authorisation for the placing in service of structural subsystems and vehicles under Directive 2008/57/EC.~~
- ~~(2) The design of the UTP categories of line as defined in section 4 is generally compatible with the operation of vehicles categorised in accordance with EN 15528:2008+A1:2012 at up to the maximum speed as shown in Appendix E. However there may be a risk of excessive dynamic effects including resonance in certain bridges which may further impact the compatibility of vehicles and infrastructure.~~
- ~~(3) Checks, based on specific operational scenarios agreed between the infrastructure manager and the railway undertaking, may be undertaken to demonstrate the compatibility of vehicles operating above the maximum speed shown in Appendix E.~~
- ~~(4) As stated in point 4.2.1 of this UTP, it is permissible to design new and upgraded lines such that they will also accommodate larger gauges, higher axle loads, greater speeds, greater usable length of platform and longer trains than those specified.~~

7.7. Specific cases

The specific cases for Member States of the European Union, [or Contracting States which apply European Union law](#) are those which are included in the INF TSI. These [specific cases](#) are not reproduced in this UTP.

[The specific cases are classified as:](#)

- [a\) 'P' cases: permanent cases;](#)
- [b\) 'T' cases: temporary cases.](#)

[Specific cases for Contracting States which are not members of the European Union are as follows:](#)



7.7.1. Particular features on the UK network for Great Britain

7.7.1.1. UTP categories of line (4.2.1)

P cases

- (1) Where line speeds are stated in kilometres per hour [km/h] as a category or performance parameter in this TSI, it shall be allowed to translate the speed to equivalent miles per hour [mph] as in Appendix G, for the United Kingdom national network in Great Britain.
- (2) Instead of the column 'Gauge' in Table 2 and Table 3 of point 4.2.1.(7), for the gauge of all lines except new, dedicated high speed lines of traffic code P1, it shall be allowed to use national technical rules as set out in Appendix Q.

7.7.1.2. Structure gauge (4.2.3.1)

P cases

Instead of point 4.2.3.1, for national gauges selected according to point 7.7.1.1.(2), the structure gauge shall be set according to Appendix Q.

7.7.1.3. Distance between track centres (4.2.3.2)

P cases

- (1) Instead of point 4.2.3.2, the nominal distance between track centres shall be 3 400 mm on straight track and curved track with a radius of 400 m or greater.
- (2) Where topographical constraints prevent a nominal distance of 3 400 mm between track centres being achieved, it is permissible to reduce the distance between track centres provided special measures are put in place to ensure a safe passing clearance between trains.
- (3) Reduction in the distance between track centres shall be in accordance with the national technical rule set out in Appendix Q.

7.7.1.4. Equivalent conicity (4.2.4.5)**P cases**

- (1) Instead of point 4.2.4.5.(3) design values of track gauge, rail head profile and rail inclination for plain line shall be selected to ensure that the equivalent conicity limits set out in Table 32 are not exceeded.

Table 32 Equivalent conicity design limit values

<u>Speed range [km/h]</u>	<u>Wheel profile</u>	
	<u>S1002, GV1/40</u>	<u>EPS</u>
<u>v < 60</u>	<u>Assessment not required</u>	
<u>60 < v ≤ 200</u>	<u>0,25</u>	<u>0,30</u>
<u>200 < v ≤ 280</u>	<u>0,20</u>	<u>0,20</u>
<u>v > 280</u>	<u>0,10</u>	<u>0,15</u>

- (2) Instead of point 4.2.4.5. (4) the following wheelsets shall be modelled passing over the designed track conditions (simulated by calculation according to EN 15302:2008+A1:2010):

- a) S 1002 as defined in Annex C of EN 13715:2006+A1:2010 with SR1.
- b) S 1002 as defined in Annex C of EN 13715:2006+A1:2010 with SR2.
- c) GV 1/40 as defined in Annex B of EN 13715:2006+A1:2010 with SR1.
- d) GV 1/40 as defined in Annex B of EN 13715:2006+A1:2010 with SR2.
- e) EPS as defined in Annex D of EN 13715:2006+A1:2010 with SR1.

For SR1 and SR2 the following values apply:

- f) For the 1 435 mm track gauge system SR1 = 1 420 mm and SR2 = 1 426 mm.

7.7.1.5. Maximum unguided length of fixed obtuse crossings (4.2.5.3)**P cases**

Instead of point 4.2.5.3, the design value of the maximum unguided length of fixed obtuse crossing

Status: **DRAFT**

Version 1

Ref.: TECH-20021

Original: EN

Date: 19.05.2020

shall be in accordance with the national technical rule set out in Appendix Q.

7.7.1.6. The immediate action limits for switches and crossings (4.2.8.6)

P cases

Instead of point 4.2.8.6.(1)(b), for the ‘CEN56 Vertical’ design of switches and crossings, a minimum value of fixed nose protection for common crossings of 1 388 mm is allowed (measured 14 mm below the running surface, and on the theoretical reference line, at an appropriate distance back from the actual (RP) of the nose as indicated in Figure 2).

7.7.1.7. Platform height (4.2.9.2)

P cases

Instead of point 4.2.9.2, for platform height, national technical rules as set out in Appendix Q shall be allowed.

7.7.1.8. Platform offset (4.2.9.3)

P cases

Instead of point 4.2.9.3, for platform offset, national technical rules as set out in Appendix Q shall be allowed.

7.7.1.9. Equivalent conicity in service (4.2.11.2)

P cases

Instead of point 4.2.11.2.(2) the infrastructure manager shall measure the track gauge and the railhead profiles at the site in question at a distance of approximate 10 m. The mean equivalent conicity over 100 m shall be calculated by modelling with the wheelsets (a) — (e) mentioned in paragraph 7.7.1.4.(2) of this UTP in order to check for compliance, for the purpose of the joint investigation, with the limit equivalent conicity for the track specified in Table 14.



7.7.1.10. Assessment of structure gauge (6.2.4.1)

P cases

Instead of point 6.2.4.1, it shall be allowed to assess structure gauge in accordance with the national technical rules as set out in Appendix Q.

7.7.1.11. Assessment of distance between track centres (6.2.4.2)

P cases

Instead of point 6.2.4.2, it shall be allowed to assess distance between track centres in accordance with the national technical rules as set out in Appendix Q.

7.7.1.12. Assessment of platform offset (6.2.4.11)

P cases

Instead of point 6.2.4.11, it shall be allowed to assess platform offset in accordance with the national technical rules as set out in Appendix Q.

7.7.2. Particular features on the UK network for Northern Ireland

7.7.2.1. Structure gauge (4.2.3.1)


P cases

Instead of point 4.2.3.1(5), for the nominal track gauge of 1 600 mm, it shall be allowed to apply the uniform structure gauge IRL3 as set out in Appendix O to this UTP.

7.7.2.2. Distance between track centres (4.2.3.2)

P cases


Instead of point 4.2.3.2(6), for the 1 600 mm track gauge, the distance between track centres shall be set on the basis of the gauges selected according to point 7.7.1.1. The nominal horizontal distance between track centres shall be specified for the design and shall consider margins for aerodynamic effects. The minimum allowed value for the uniform structure gauge IRL3 is an open point.

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 70 of 106
INFRASTRUCTURE				
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

7.7.2.3. Assessment of structure gauge (6.2.4.1)

P cases


Instead of point 6.2.4.1(5), for the 1 600 mm track gauge, assessment of structure gauge as a design review is to be made against characteristic cross sections using the structure gauge 'IRL3' as defined in Appendix O to this TSI.

 OTIF	SUBSYSTEM INFRASTRUCTURE INFRASTRUCTURE			Page 71 of 106
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

APPENDIX A

Assessment of interoperability constituents


Reserved

 OTIF	SUBSYSTEM INFRASTRUCTURE INFRASTRUCTURE			Page 72 of 106
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

APPENDIX B

Assessment of the infrastructure subsystem

Reserved

 OTIF	SUBSYSTEM INFRASTRUCTURE INFRASTRUCTURE			Page 73 of 106
	Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN

APPENDIX C

Technical characteristics of track design and switches and crossings design

–


APPENDIX C.1

Technical characteristics of track design

Track design shall be at least defined by the technical characteristics as follows:

- a) Rail
 - Profile(s) & grades
 - Continuous welded rail or length of rails (for jointed track sections)
- b) Fastening system
 - Type
 - Pad stiffness
 - Clamping force
 - Longitudinal restraint
- c) Sleeper
 - Type
 - Resistance to vertical loads:
 - Concrete: design bending moments
 - Wood: compliance to EN 13145:2001
 - Steel: moment of inertia of cross section
 - Resistance to longitudinal and lateral loads: geometry and weight
 - Nominal and design track gauge
- d) Rail inclination
- e) Ballast cross sections (ballast shoulder — ballast thickness)
- f) Ballast type (grading = granulometrie)
- g) Sleeper spacing
- h) Special devices: for example sleeper anchors, third/fourth rail, ...

–


 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 74 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

APPENDIX C.2

Technical characteristics of switches and crossings design

Switches and crossings design shall be at least defined by the technical characteristics as follows:

- a) Rail
 - Profile(s) & grades (switch rail, stock rail)
 - Continuous welded rail or length of rails (for jointed track sections)
- b) Fastening system
 - Type
 - Pad stiffness
 - Clamping force
 - Longitudinal restraint
- c) ~~Bearer~~Sleeper
 - Type
 - Resistance to vertical loads:
 - Concrete: design bending moments
 - Wood: compliance to EN 13145:2001
 - Steel: moment of inertia of cross section
 - Resistance to longitudinal and lateral loads: geometry and weight
 - Nominal and design track gauge
- d) Rail inclination
- e) Ballast cross sections (ballast shoulder — ballast thickness)
- f) Ballast type (grading = granulometrie)
- g) Type of crossing (fixed or movable point)
- h) Type of locking (switch pannel, movable point of crossing)
- i) Special devices: for example sleeper anchors, third/fourth rail, ...
- j) Generic switches and crossings drawing indicating
 - Geometrical diagram (triangle) describing the length of the turnout and the tangents at the end of the turnout
 - Main geometrical characteristics like the main radii in switch, closure and crossing panel, crossing angle
 - Sleeper spacing

 OTIF	SUBSYSTEM INFRASTRUCTURE INFRASTRUCTURE			Page 75 of 106
	Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN

APPENDIX D

Conditions of use of track design and switches and crossings design

–

APPENDIX D.1

Conditions of use of track design

Conditions of use of track design are defined to be as follows:

- a) Maximum axle load (t)
- b) Maximum line speed (km/h)
- c) Minimum horizontal curve radius (m)
- d) Maximum cant (mm)
- e) Maximum cant deficiency (mm)

–


APPENDIX D.2

Conditions of use of switches and crossings design

Conditions of use of switches and crossings design are defined to be as follows:

- a) Maximum axle load (t)
- b) Maximum line speed (km/h) on through route and diverging track of switches
- c) Rules for curved turnouts based on generic designs, giving minimum curvatures (for through route and diverging track of switches)

–

 OTIF	SUBSYSTEM INFRASTRUCTURE		Page 76 of 106	
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

APPENDIX E

Capability requirements for structures according to traffic code

The minimum capability requirements for structures are defined in Table 38 and Table 39 according to the traffic codes given in Table 2 and Table 3. The capability requirements are defined in Table 38 and Table 39 by a combined quantity comprising of the EN line category and a corresponding maximum speed. The EN line category and associated speed shall be considered as a single combined quantity.

EN line category is a function of axle load and geometrical aspects relating to the spacing of axles. EN line categories are set out in Annex A of EN 15528:2015 ~~08+A1:2012~~.

Table 38 EN Line Category –Associated Speed ⁽¹⁾ ⁽⁶⁾ [km/h] — Passenger traffic

Traffic code	Passenger Carriages (including Coaches, Vans and Car Carriers) and Light Freight Wagons ⁽²⁾ ⁽³⁾	Locomotives and Power Heads ⁽²⁾ ⁽⁴⁾	Electric or Diesel Multiple Units, Power Units and Railcars ⁽²⁾ ⁽³⁾
P1	Open point		
P2			
<u>P1</u>	<u>n.a. ⁽¹²⁾</u>	<u>n.a. ⁽¹²⁾</u>	<u>Open point</u>
<u>P2</u>	<u>n.a. ⁽¹²⁾</u>	<u>n.a. ⁽¹²⁾</u>	<u>Open point</u>
P3a (> 160 km/h)	A – 200 B1 – 160	D2 – 200 ⁽¹¹⁾	Open point
P3b (≤ 160 km/h)	B1 – 160	D2 – 160	C2 ⁽¹⁸⁾ – 160 D2 ⁽⁹⁾ – 120
P4a (> 160 km/h)	A – 200 B1 – 160	D2 – 200 ⁽¹¹⁾	Open point
P4b (≤ 160 km/h)	A – 160 B1 – 140	D2 – 160	B1 ⁽⁷⁾ – 160 C2 ⁽⁸⁾ – 140 D2 ⁽⁹⁾ – 120
P5	B1 – 120	C2 – 120 ⁽⁵⁾	B1 ⁽⁷⁾ – 120
P6	a12-⁽¹⁰⁾		
P1520	Open point		
P1600	Open point		


 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 77 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

Table 39 EN Line Category –Associated Speed ⁽¹⁾ ⁽⁶⁾ [km/h] — Freight traffic

Traffic code	Freight wagons and other vehicles	Locomotives (2)
F1	D4 – 120	D2 – 120
F2	D2 – 120	D2 – 120
F3	C2 – 100	C2 – 100
F4	B2 – 100	B2 – 100
F1520	Open point	
F1600	Open point	

Notes:

⁽¹⁾ The indicated speed value in the table represents the maximum requirement for the line and may be lower in accordance with the requirements in point 4.2.1(102). When checking individual structures on the line, it is acceptable to take account of the type of vehicle and local allowed speed.

⁽²⁾ Passenger Carriages (including Coaches, Vans, Car Carriers), Other Vehicles, Locomotives, Power Heads, Diesel and Electric Multiple Units, Power Units and Railcars are defined in the UTP ~~rolling stock~~ **LOC & PAS**. Light Freight Wagons are defined as vans except that they are allowed to be conveyed in formations which are not intended to convey passengers.

⁽³⁾ The requirements for structures are compatible with Passenger Coaches, Vans, Car Carriers, Light Freight Wagons and vehicles in Diesel and Electric Multiple Units and Power Units with a length of; 18 m to 27,5 m for conventional and articulated vehicles and with a length of 9 m to 14 m for regular single axles.

⁽⁴⁾ The requirements for structures are compatible with up to two adjacent coupled locomotives and/or power heads. The requirements for structures are compatible with a maximum speed of 120 km/h for three or more adjacent coupled locomotives and/or power heads (or a train of locomotives and/or power heads) subject to the locomotives and/or power heads satisfying the corresponding limits for freight wagons.

⁽⁵⁾ For traffic code P5 the Contracting State may indicate whether the requirements for locomotives and power heads apply.


⁽⁶⁾ When checking the compatibility of individual trains and structures, the basis of the compatibility check shall be in accordance with Appendix K to this UTP.

⁽⁷⁾ The requirements for structures are compatible with an average mass per unit length over the length of each coach/vehicle of 2,75 t/m

⁽⁸⁾ The requirements for structures are compatible with an average mass per unit length over the length of each coach/vehicle of 3,1 t/m


⁽⁹⁾ The requirements for structures are compatible with an average mass per unit length over the length of each coach/vehicle of 3,5 t/m

⁽¹⁰⁾ See Appendix L to this UTP

 OTIF	SUBSYSTEM INFRASTRUCTURE INFRASTRUCTURE			Page 78 of 106
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

(¹¹) Only 4 axle vehicles allowed. The spacing of the axles in a bogie shall be at least 2,6 m. The average mass per unit length over the length of the vehicle shall not exceed 5,0 t/m.

(¹²) Taking into account the state of art of operation there is no need to define harmonized requirements to deliver an adequate level of interoperability for this type of vehicles for P1 and P2 traffic codes.

 OTIF	SUBSYSTEM INFRASTRUCTURE		Page 79 of 106	
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

APPENDIX F

Capability requirements for structures according to traffic code in the United Kingdom of Great Britain and Northern Ireland

The minimum capability requirements for structures are defined in Table 40 and Table 41 according to the traffic codes given in Table 2 and Table 3. The capability requirements are defined in Table 40 and Table 41 by a combined quantity comprising of the Route Availability number and a corresponding maximum speed. The Route Availability number and associated speed shall be considered as a single combined quantity.

The Route Availability number is a function of axle load and geometrical aspects relating to the spacing of axles. Route Availability numbers are defined in the national technical rules notified for this purpose.

Table 40 Route Availability number –Associated Speed ⁽¹⁾ ⁽⁵⁾ (miles per hour) — Passenger traffic

Traffic code	Passenger Carriages (including Coaches, Vans and Car Carriers) and Light Freight Wagons ⁽²⁾ ⁽³⁾ ⁽⁶⁾	Locomotives and Power Heads ⁽²⁾ ⁽⁴⁾	Electric or Diesel Multiple Units, Power Units and Railcars ⁽²⁾ ⁽³⁾ ⁽⁶⁾
P1	Open point		
P2			
<u>P1</u>	<u>n.a. ⁽¹¹⁾</u>	<u>n.a. ⁽¹¹⁾</u>	<u>Open point</u>
<u>P2</u>	<u>n.a. ⁽¹¹⁾</u>	<u>n.a. ⁽¹¹⁾</u>	<u>Open point</u>
P3a (> 160 km/h)	RA1 – 125 RA2 – 90	RA7 – 125 ⁽⁷⁾ RA8 – 110 ⁽⁷⁾ RA8 – 100 ⁽⁸⁾ RA5 – 125 ⁽⁹⁾	Open point
P3b (≤ 160 km/h)	RA1 – 100 RA2 – 90	RA8 – 100 ⁽⁸⁾ RA5 – 100 ⁽⁹⁾	RA3 – 100
P4a (> 160 km/h)	RA1 – 125 RA2 – 90	RA7 – 125 ⁽⁷⁾ RA7 – 100 ⁽⁸⁾ RA4 – 125 ⁽⁹⁾	Open point
P4b (≤ 160 km/h)	RA1 – 100 RA2 – 90	RA7 – 100 ⁽⁸⁾ RA4 – 100 ⁽⁹⁾	RA3 – 100
P5	RA1 – 75	RA5 – 75 ⁽⁸⁾ ⁽¹⁰⁾ RA4 – 75 ⁽⁹⁾ ⁽¹⁰⁾	RA3 – 75
P6	RA1		
P1600	Open point		


 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 80 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

Table 41 Route Availability number –Associated Speed ⁽¹⁾ ⁽⁵⁾ (miles per hour) — Freight traffic

Traffic code	Freight wagons and other vehicles	Locomotives ⁽²⁾ ⁽⁴⁾ ⁽⁸⁾
F1	RA8 – 75	RA7 – 75
F2	RA7 – 75	RA7 – 75
F3	RA5 – 60	RA7 – 60
F4	RA4 – 60	RA5 – 60
F1600	Open point	

Notes:

⁽¹⁾ The indicated speed value in the table represents the maximum requirement for the line and may be lower in accordance with the requirements in point 4.2.1 (129). When checking individual structures on the line, it is acceptable to take account of the type of vehicle and local allowed speed.

⁽²⁾ Passenger Carriages (including Coaches, Vans, Car Carriers), Other Vehicles, Locomotives, Power Heads, Diesel and Electric Multiple Units, Power Units and Railcars are defined in the UTP [LOC & PAS rolling stock](#). Light Freight Wagons are defined as vans except that they are allowed to be conveyed in formations which are not intended to convey passengers.

⁽³⁾ The requirements for structures are compatible with Passenger Coaches, Vans, Car Carriers, Light Freight Wagons and vehicles in Diesel and Electric Multiple Units and Power Units with a length of; 18 m to 27,5 m for conventional and articulated vehicles and with a length of 9 m to 14 m for regular single axles.

⁽⁴⁾ The requirements for structures are compatible with up to two adjacent coupled locomotives and/or power heads. The requirements for structures are compatible up to a maximum speed of 75 mph for up to five adjacent coupled locomotives and/or power heads (or a train of locomotives and/or power heads) subject to the locomotives and/or power heads satisfying the corresponding limits for freight wagons.

⁽⁵⁾ When checking the compatibility of individual trains and structures, the basis of the compatibility check shall be in accordance with Appendix K except where modified by the national technical rules notified for this purpose.

⁽⁶⁾ The requirements for structures are compatible with an average mass per unit length over the length of each coach/vehicle of 3,0 t/m


⁽⁷⁾ Only 4 axle vehicles allowed. The spacing of the axles in a bogie shall be at least 2,6 m. The average mass per unit length over the length of the vehicle shall not exceed 4,6 t/m.

⁽⁸⁾ 4 or 6 axle vehicles allowed.

⁽⁹⁾ Powerhead, only 4 axle vehicles allowed. Also includes locomotives where difference in length between locomotive and hauled vehicles is less than 15 % of length of hauled vehicles for speeds over 90 mph.

⁽¹⁰⁾ For traffic code P5 the Contracting State may indicate whether the requirements for locomotives and power heads apply.

[\(11\) Taking into account the state of art of operation there is no need to define harmonized requirements to deliver an adequate level of interoperability for this type of vehicles for P1 and P2 traffic codes.](#)


 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 81 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

APPENDIX G

Speed conversion to miles per hour for Ireland and the United Kingdom of Great Britain and Northern Ireland

Table 42 Speed conversion from (km/h) to (mph)


Speed [km/h]	Speed [mph]
2	1
3	1
5	3
10	5
15	10
20	10
30	20
40	25
50	30
60	40
80	50
100	60
120	75
140	90
150	95
160	100
170	105
180	110
190	120
200	125
220	135
225	140
230	145
250	155
280	175
300	190
320	200
350	220

 OTIF	SUBSYSTEM INFRASTRUCTURE		Page 82 of 106
	INFRASTRUCTURE		
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN
			Date: 19.05.2020

APPENDIX H

Structure gauge for the 1 520 mm track gauge system

Figure 3 Structure gauge S for the 1 520 mm track gauge system (dimensions in mm)

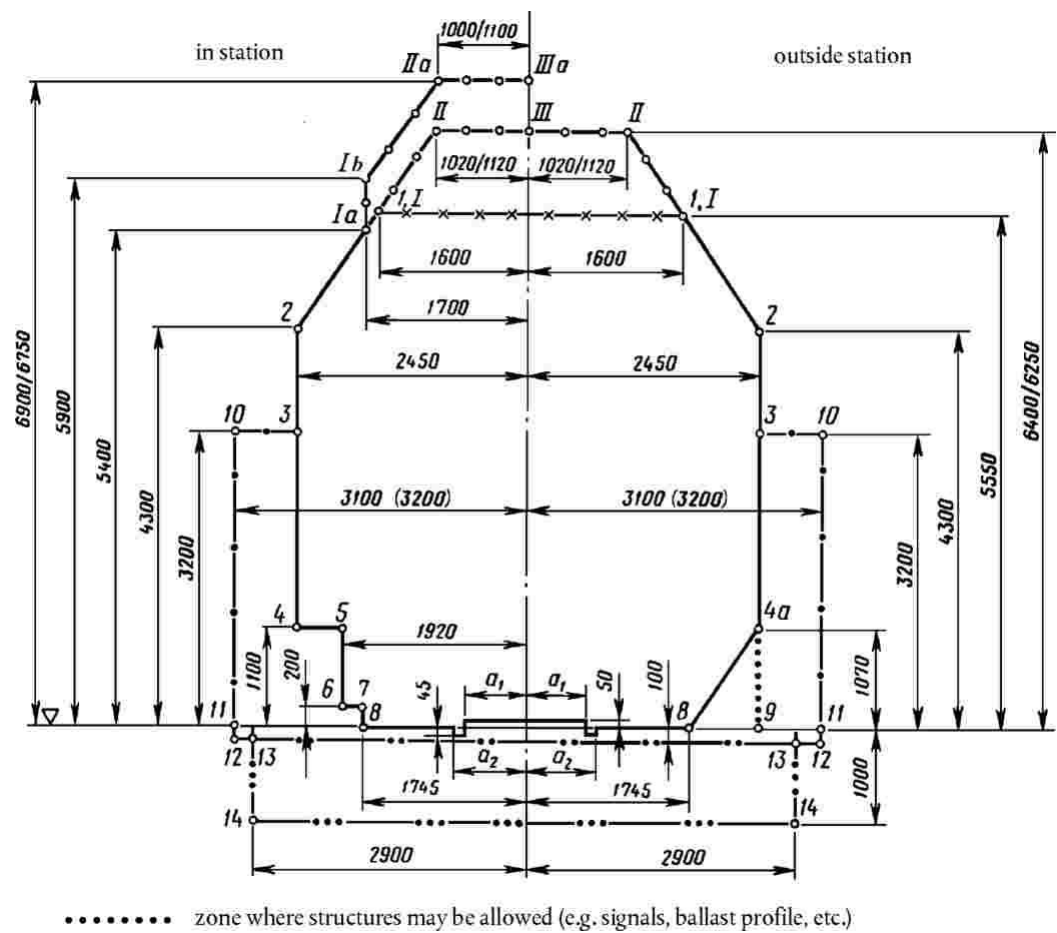

Clarifications for Figure 3:

All horizontal dimensions shall be measured from the centre of the track, and all vertical dimensions shall be measured from the top of the rail head level.


Left side of contour — applications for tracks in the railway station, stop/halt and for branch tracks/industry track (except contour Ia, Ib, IIa, IIIa),

Right side of contour — applications for tracks on the plain line.

Application of specific parts of the contour:

1,I — 1, I — contour of structure gauge for non-electrified tracks,

1,I — II — III — II — 1,I — contour of structure gauge for electrified tracks — for tracks on the plain (open) line and for tracks in the railway station and for branch/industry tracks, where standing of vehicles is not expected,

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 83 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

Ia — Ib — IIa — IIIa — contour of structure gauge for electrified tracks — for other station tracks and other branch/industry tracks

Note: Values of 1 000 mm, 1 020 mm, 6 900 mm and 6 400 mm given in the numerators are for contact system with carrying cable.

Values of 1 100 mm, 1 120 mm, 6 750 mm and 6 250 mm given in the denominator are for contact system without carrying cable,

11 — 10 — 3 — contour of structure gauge for structures and equipment (except tunnel, bridge, platform, ramp) on the outside of ‘edge’ tracks;

9 — 4a — contour of structure gauge for tunnel, for railing on the bridge, elevated track (ballast profile), signals, embankment wall and for railing on the other structures of railway subgrade,


12-12 — contour from which (on track between stations or in stations within usable length of track) any device could not be above (higher), except level crossing covering, locomotive signaling inductors, switches mechanism and their near situated signaling and safety equipment

14-14 — contour of building (or foundation), underground cables, steel cables, pipes and other not railway structures (except signalling and safety equipment)

For nominal track gauge of 1 520 mm $a_1 = 670$ mm and $a_2 = 760$ mm.

For nominal track gauge of 1 524 mm $a_1 = 672$ mm and $a_2 = 762$ mm.

Figure 4 Reference profile of the lower parts on tracks fitted with double slip

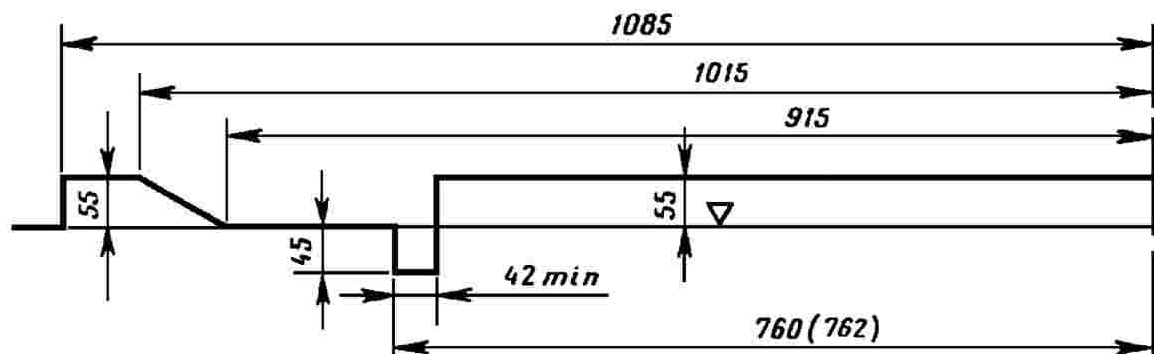

Clarification for Figure 4:

The distance of 760 mm is for track gauge 1 520 mm, and 762 mm for track gauge 1 524 mm.

Figure 5 Reference profile of the lower parts on marshalling yards fitted with rail brakes




Status: **DRAFT**


Version 1

Ref.: TECH-20021

Original: EN

Date: 19.05.2020

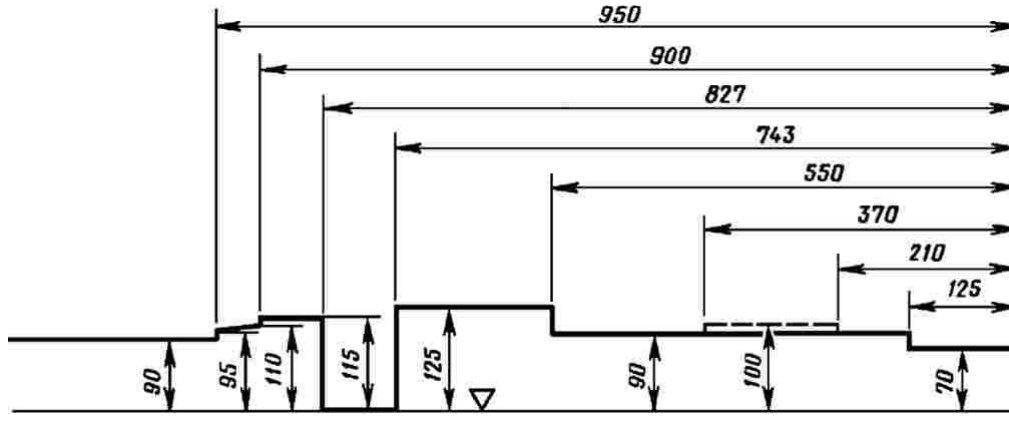

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 87 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020


APPENDIX J

Safety assurance over fixed obtuse crossings

(J.1) The fixed obtuse crossings should be designed in order not to have a too long unguided length. In obtuse crossing check rails cannot be constructed to assure guidance over the whole length. This unguided length can be accepted up to a certain limit, defined by a reference situation defining:

- Minimum crossing angle: tangent 1 in 9 ($\text{tg}\alpha = 0,11$, $\alpha = 6\ 20'$)
- Minimum radius through obtuse crossing: 450 m
- Minimum height of check rail: 45 mm
- Nose shape as defined in the figure below

Figure 6 Obtuse crossing

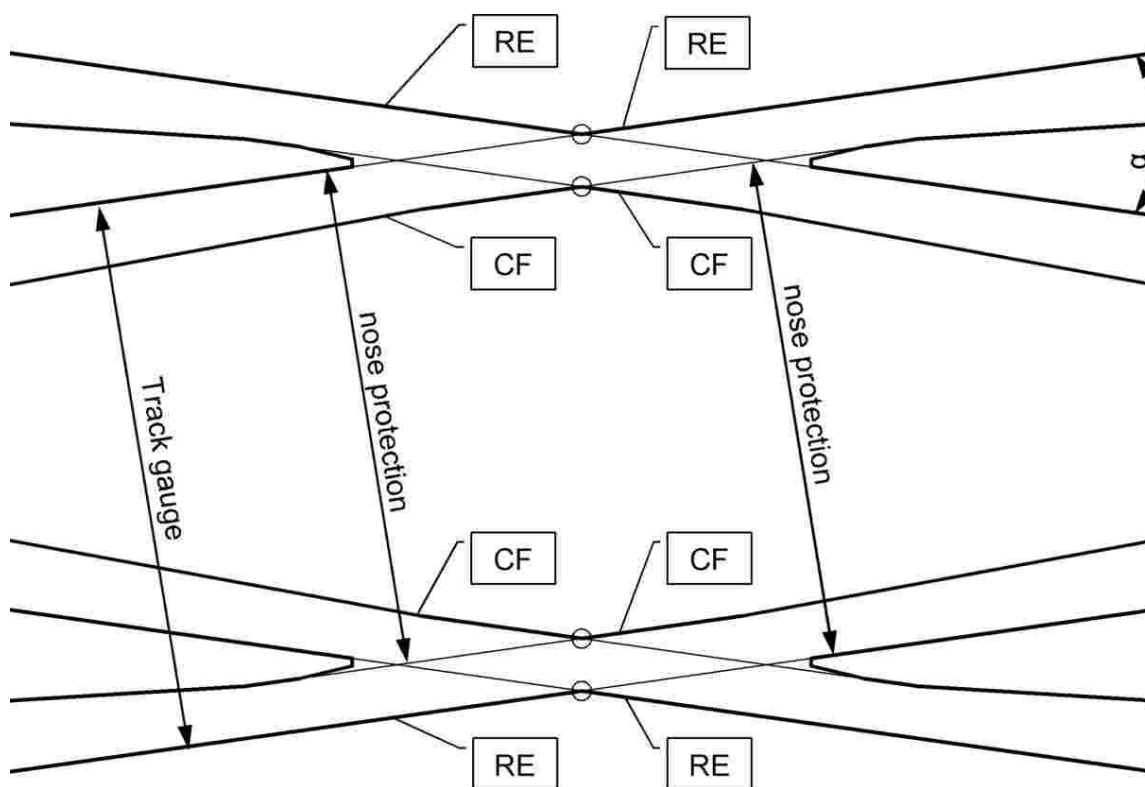

RE = running edge
CF = check face (guiding edge)


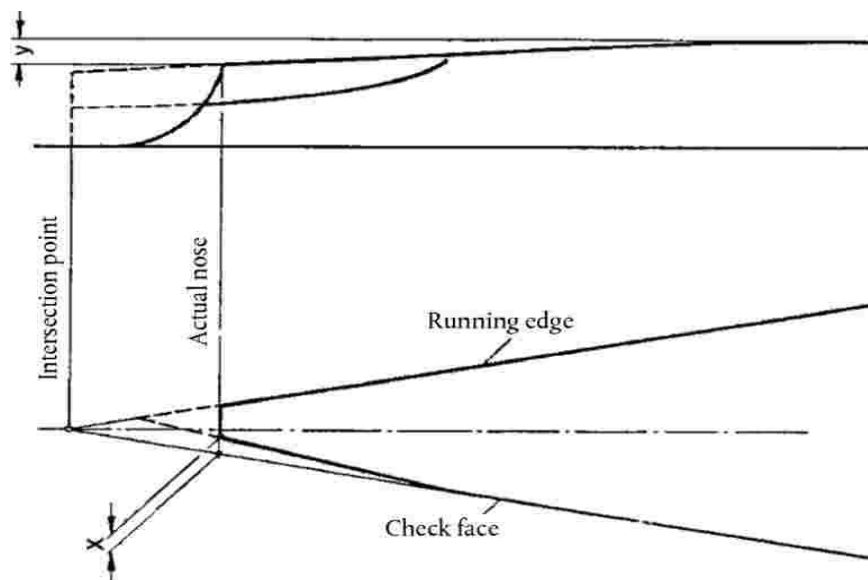
 OTIF	SUBSYSTEM INFRASTRUCTURE		Page 88 of 106
	INFRASTRUCTURE		
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN
			Date: 19.05.2020

Figure 7 Point retraction X on check face



$X = 3 \text{ mm}$ (over a length of 150 mm).

$Y = 8 \text{ mm}$ (over a length of 200 to 500 mm approximately)

- (J.2) If one or more of the above requirements is not respected, the design shall be checked, verifying either the equivalence of the unguided length or acceptance of the interference between wheel and nose when they get in contact.
- (J.3) The design shall be checked for wheels with diameter between 630 mm and 840 mm. For wheel diameters between 330 mm and 630 mm specific demonstrations are required.
- (J.4) The following graphs allow simple verification of unguided length for specific situation with different crossing angles, height of check rail and different crossing curvature.

The graphs consider the following maximum track tolerances:


- a) Track gauge between 1 433 mm and 1 439 mm inclusive
- b) Nose protection between 1 393 mm and 1 398 mm inclusive
- c) Free wheel passage $\leq 1\ 356 \text{ mm}$

Figure 8 allows to specify the minimum wheel diameter that can run on curved obtuse crossings with a radius of 450 m, Figure 9 allows it for straight obtuse crossings.

For other situations specific calculations can be performed.

- (J.5) For track gauge systems other than 1 435 mm, specific calculations shall be performed.


Figure 8 Minimum wheel diameter against crossing angle for 450 m radius of obtuse crossing

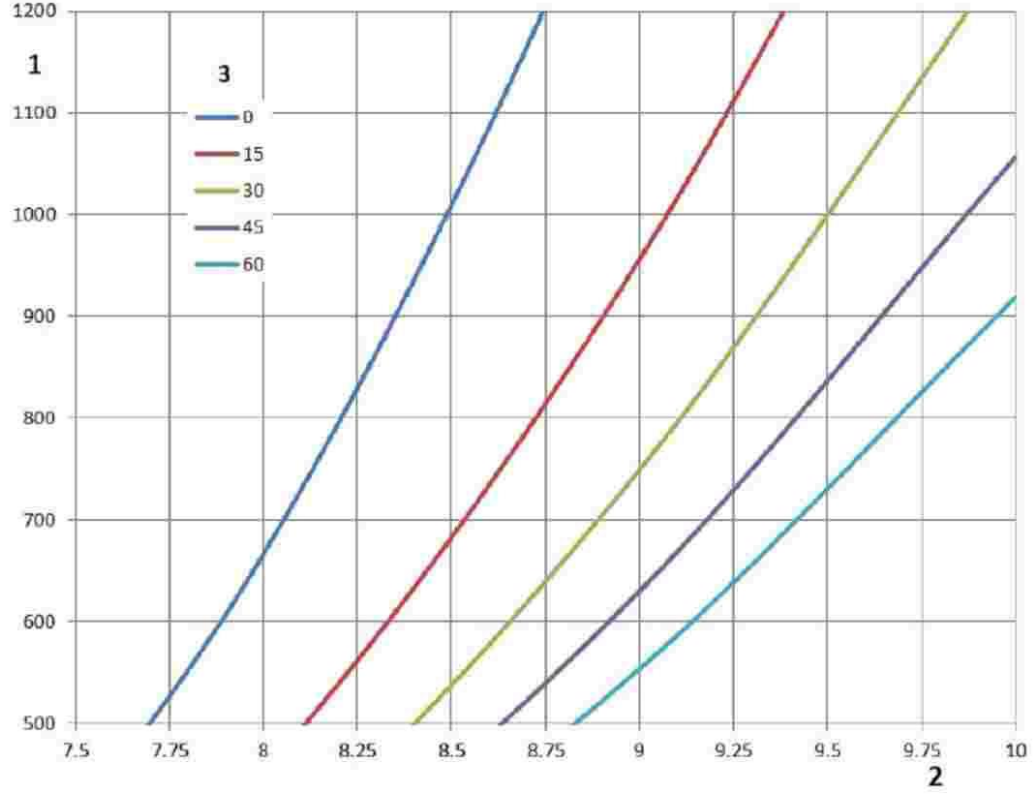


1. Minimum wheel diameter (mm)
2. N for crossing angle tangent 1 in N
3. Height of check rail (mm) (Z3)



Figure 9 Minimum wheel diameter against crossing angle for straight obtuse crossing

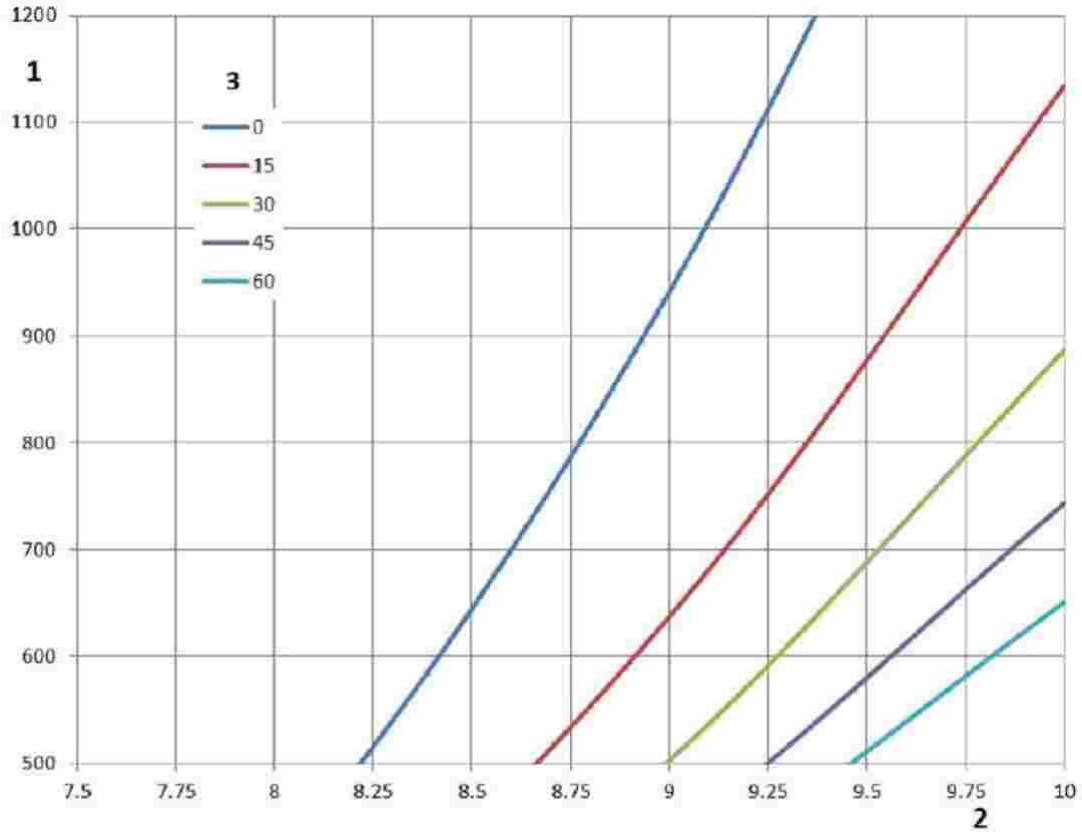

1. Minimum wheel diameter (mm)
2. N for crossing angle tangent 1 in N
3. Height of check rail (mm) (Z3)

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 91 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

APPENDIX K

Basis of minimum requirements for structures for passenger coaches and multiple units

The following mass definitions for passenger carriages and multiple units form the basis of the minimum requirements for structures and checking the compatibility of structures with passenger coaches and multiple units.

The EN line categories in Appendix E are based upon the design mass under exceptional payload according to section 2.1 of EN 15663:2009+AC:2010 taking the values for passenger payload in standing areas given in Table 45 into account.

Where checks on the dynamic response of rail bridges are required to specify the load carrying capacity of the bridge, the load capacity of the bridge should be specified and expressed in terms of the design mass under normal payload according to section 2.1 of EN 15663:2009+AC:2010 taking the values for passenger payload in standing areas given in Table 45 into account.

~~It is anticipated that the next revision of EN15528+A1:2012 will specify that these mass definitions shall be used when checking the compatibility of infrastructure and rolling stock.~~

Table 45 Passenger payload in standing areas in kg/m²

Type of trains	Normal payload to specify Dynamic Compatibility	Exceptional payload to specify Line Category (Static Compatibility)
High speed and long distance trains Table 3 in EN 15663:2009+AC:2010	160 ⁽¹⁾	320
High speed and long distance trains Reservation Obligatory Table 3 in EN 15663:2009+AC:2010	0	320
Others (regional, commuter, suburban trains) Table 4 in EN 15663:2009+AC:2010	280	500 ⁽²⁾

⁽¹⁾ Normal payload of Table 3 of EN 15663:2009+AC:2010 plus an additional 160 kg/m² for standing areas

⁽²⁾ For certain types of commuter services (e.g. RATP Paris) the passenger payload in standing areas is 700 kg/m²

APPENDIX L

Definition of EN line category a12 for traffic code P6

Traffic code P6 is defined by EN line category **a12**.

EN line category **a12** is defined by a load model comprising of an unlimited number of the reference wagon **a12** as defined in Figure 11. The reference wagon **a12** is defined by axle load, the geometrical characteristics of the spacing of axles and the mass per unit length as defined in Figure 10.

Figure 10 Reference wagon of EN line category a12

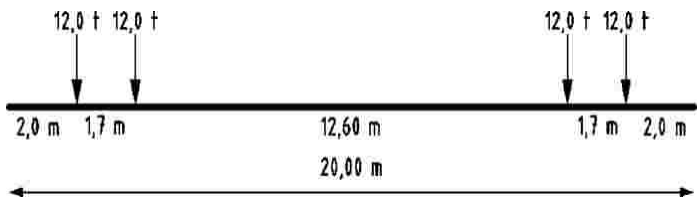

Reference wagon	Axle load P (t)	Mass per unit length p (t/m)	Geometrical characteristics
a12	12,0	2,4	


Figure 11 Load model of EN line category a12

Line category	Arrangement of reference wagons n ... unlimited number
a12	<p align="center">$n \times a12$</p> 

For the classification of infrastructure, EN line category **a12** shall be used in accordance with chapter 5 of EN 15528:2008+A1:2012.

General information concerning the use of EN line category **a12** for the categorisation of vehicles into EN line categories is given in chapter 6.1 of EN 15528:2008+A1:2012 and shall be read in conjunction with Appendix K of this UTP.

It is anticipated that the next revision of EN 15528+A1:2012 will include line category **a12**.


 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 93 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

APPENDIX M

Reserved


~~Specific case on the Estonian network~~

~~1) Locomotive~~

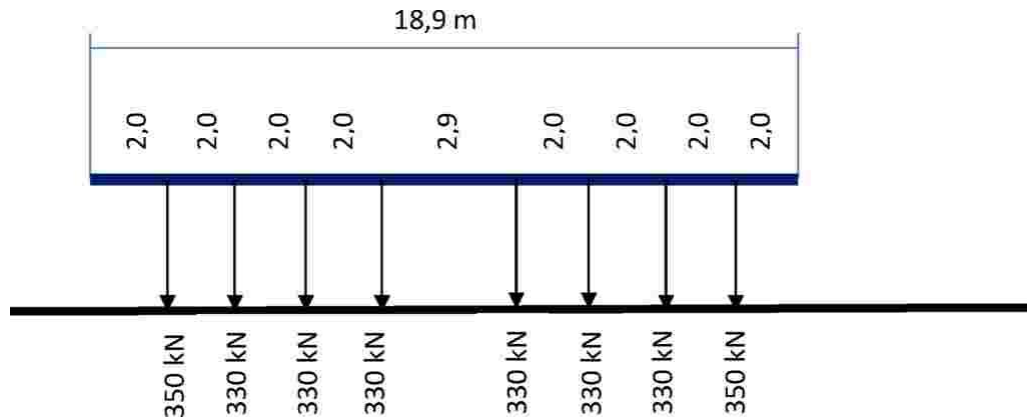

~~2) Distributed load: 140 kN/m~~

~~3) Wagon~~

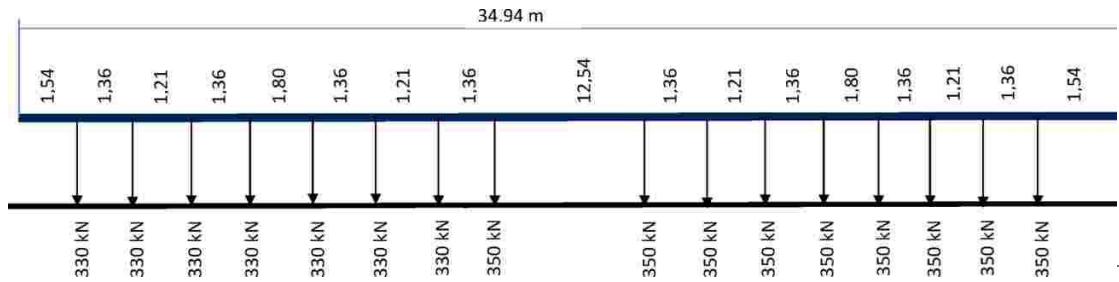

APPENDIX N


~~Specific cases of the Hellenic network~~

Deleted

APPENDIX O

Specific case on the Ireland and United Kingdom of Northern Ireland networks

Rules and drawings related to gauges IRL1, IRL2 and IRL3 are an open point.

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 94 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

APPENDIX P

Reserved

~~Structure gauge for the lower parts for the 1 668 mm track gauge on the Spanish network~~


~~Structures gauges shall be obtained on the basis of the kinematic reference profiles and associated rules. Calculations of structure gauge shall be done using the kinematic method in accordance with the requirements of chapters 5, 7 and 10 of EN 15273 3:2013 with the kinematic reference profiles and associated rules defined in this Appendix.~~

~~P.1. REFERENCE PROFILES~~

~~P.1.1. Kinematic reference profile GEI1~~

~~Figure 12 shows the reference profile for kinematic gauge GEI1 for vehicles which can pass over rail brakes in an active position.~~

~~Figure 12 Reference profile of lower parts of kinematic gauge GEI1 for vehicles which can pass over rail brakes in an active position (l = track gauge)
(Dimensions in millimeters)~~

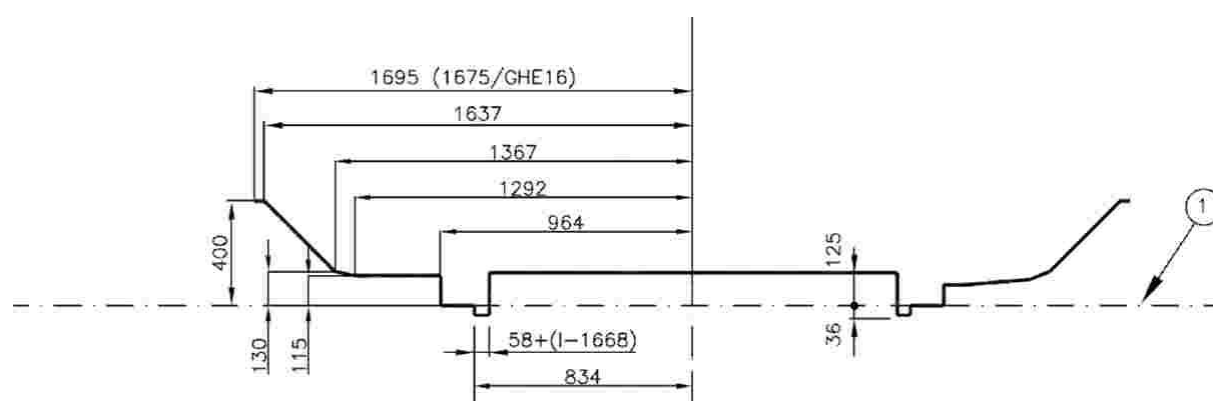


~~1) Running surface.~~

~~P.1.2. Kinematic reference profile GEI2~~

~~Figure 13 shows the reference profile for kinematic gauge GEI2 for vehicles which may pass over rail brakes in a non active position.~~



Figure 13 Reference profile of lower parts of kinematic gauge GEI2 for vehicles which may pass over rail brakes in a non-active position (l = track gauge)
(Dimensions in millimeters)

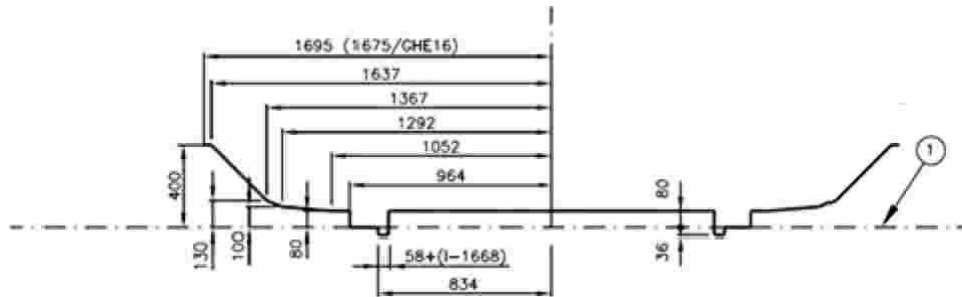

1) Running surface.

P.2. ASSOCIATED RULES

Table 46 shows the additional overthrows for gauges GEI1 and GEI2.


Table 46 Rules for additional overthrows S for gauges GEI1 and GEI2

Additional overthrows for track gauge 'l' and height 'h' compared to the running surface	
Radius	$h \leq 0,4 \text{ m}$
$250 \leq R < \infty$	$S_{icin} = S_{acin} = \frac{2,5}{R} + \frac{1 - 1,668}{2}$
$150 \leq R < 250$	$S_{icin} = \frac{50}{R} - 0,19 + \frac{1 - 1,668}{2}$ $S_{acin} = \frac{60}{R} - 0,23 + \frac{1 - 1,668}{2}$

P.3. VERTICAL LOWERING

The heights of the lower part must be reduced by the value $50/R_v$ (m), the radius being in metres.

The vertical curve radius R_v is limited to 500 m. Heights not exceeding 80 mm shall be considered as zero within a radius R_v between 500 m and 625 m

 OTIF	SUBSYSTEM INFRASTRUCTURE		Page 96 of 106	
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

APPENDIX Q

National technical rules for UK-GB Specific Cases

The National Technical Rules for UK-GB specific cases referred to in point 7.7.1.17 of this [TSI-UTP](#) are contained in the documents listed in Table 47. All documents are available on www.rgsonline.co.uk.

Table 47 Notified national technical rules for UK-GB Specific Cases

Specific Case	TSI-UTP Point	Requirement	NTR Ref	NTR Title
7.7.17.1	4.2.1: Table 2 & Table 3	Categories of line: Gauge	GI/RT7073	Requirements for the Position of Infrastructure and for Defining and Maintaining Clearances
			GC/RT5212	
			GE/RT8073	Requirements for the Application of Standard Vehicle Gauges
			GI/RT7020+6	GB Requirements for Platform Height, Platform Offset and Platform Width Interface between Station Platforms, Track and Trains
7.7.17.2 & 7.7.17.98	4.2.3.1 & 6.2.4.1	Structure gauge	GI/RT7073	Requirements for the Position of Infrastructure and for Defining and Maintaining Clearances
			GC/RT5212	
			GE/RT8073	Requirements for the Application of Standard Vehicle Gauges
			GI/RT7020+6	GB Requirements for Platform Height, Platform Offset and Platform Width Interface between Station Platforms, Track and Trains
7.7.17.3 & 7.7.17.109	4.2.3.2: Table 4 & 6.2.4.2	Distance between track centres	GC/RT5212 RT7073	Requirements for the Position of Infrastructure and for Defining and Maintaining Clearances
7.7.17.4	4.2.5.3 & Appendix annex J	Maximum unguided length of fixed obtuse crossings	GC/RT5021	Track System Requirements
			GM/RT2466	Railway Wheelsets
7.7.17.6	4.2.9.2	Platform height	GI/RT7020+6	GB Requirements for Platform Height, Platform Offset and Platform Width Interface between Station Platforms, Track and Trains
		Platform offset	GI/RT7020+6	GB Requirements for Platform Height, Platform Offset and Platform



OTIF

**SUBSYSTEM INFRASTRUCTURE
INFRASTRUCTURE**

Page 97 of 106

Status: **DRAFT**


Version 1

Ref.: TECH-20021

Original: EN

Date: 19.05.2020


7.7. 17.7 & 7.7. 17.11 0	4.2.9.3 & 6.2.4.11			Width Interface between Station Platforms, Track and Trains
			GIC/RT5212 RT7073	Requirements for the Position of Infrastructure and for Defining and Maintaining Clearances

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 98 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

APPENDIX R

List of open points

- ~~(1)~~ Requirements for the design of track, including switches and crossings, which are compatible with the use of eddy current braking systems (4.2.6.2.2)
- ~~(2)~~ Minimum factor alpha (a) for Traffic codes P1520 and F1520 (4.2.7.1.1)
- ~~(3)~~(1) Immediate action limits for isolated defects in alignment for speeds of more than 300 km/h (4.2.8.1)
- ~~(4)~~(2) Immediate action limits for isolated defects in longitudinal level for speeds of more than 300 km/h (4.2.8.2)
- ~~(5)~~(3) The minimum allowed value of distance between track centres for the uniform structure gauge IRL3 is an open point (7.7.18.2)
- ~~(6)~~(4) EN Line Category –Associated Speed [km/h] for Traffic codes P1 (multiple units), P2 (multiple units), P3a (multiple units), P4a (multiple units), P1520 (all vehicles), P1600 (all vehicles), F1520 (all vehicles) and F1600 (all vehicles) in Appendix E, Tables 38 and 39.)
- ~~(7)~~(5) Route Availability Number ~~EN Line Category~~ –Associated Speed (~~[miles~~km/h]) for Traffic codes P1 (multiple units), P2 (multiple units), P3a (multiple units), P4a (multiple units), P1600 (all vehicles) and F1600 (all vehicles) Appendix F, Tables 40 and 41.)
- ~~(8)~~(6) Rules and drawings related to gauges IRL1, IRL2 and IRL3 are an open point (Appendix O).
- ~~(9)~~(7) The Rrequirements for mitigating the risk related to the ‘for ballast pick up’ for speed greater than 250 km/h.phenomenon (point 4.2.10.3) (open point also in the LOC&PAS UTP)

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 99 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

APPENDIX S

Glossary

Table 48 Terms

Defined term	UTP point	Definition
Actual point (RP)/ Praktischer Herzpunkt/ Pointe de coeur	4.2.8.6	Physical end of a crossing vee. See Figure 2, which shows the relationship between the actual point (RP) and the intersection point (IP).
Alert limit/ Auslösewert/ Limite d'alerte	4.5.2	Refers to the value which, if exceeded, requires that the track geometry condition is analysed and considered in the regularly planned maintenance operations.
Axle load/ Achsfahrmasse/ Charge à l'essieu	4.2.1, 4.2.6.1	Sum of the static vertical wheel forces exerted on the track through a wheelset or a pair of independent wheels divided by acceleration of gravity.
Braking systems independent of wheel-rail adhesion conditions' De Fr	4.2.6.2.2	“Braking systems independent of wheel – rail adhesion conditions” refers to all brake systems of the rolling stock capable to develop a brake force applied to the rails independently of the wheel – rail adhesion conditions (e.g. magnetic braking systems and eddy current braking systems)
Cant/ Überhöhung/ Dévers de la voie	4.2.4.2 4.2.8.5	Difference in height, relative to the horizontal, of the two rails of one track at a particular location, measured at the centrelines of the heads of the rails.
Cant deficiency/ Überhöhungsfehlbetrag/ Insuffisance de devers	4.2.4.3	Difference between the applied cant and a higher equilibrium cant.
Common crossing/ Starres Herzstück/ Coeur de croisement	4.2.8.6	Arrangement ensuring intersection of two opposite running edges of turnouts or diamond crossings and having one crossing vee and two wing rails.
Crosswind/ Seitenwind/ Vents traversiers	4.2.10.2	Strong wind blowing laterally to a line which may adversely affect the safety of trains running.
Design value/ Planungswert/ Valeur de conception	4.2.3.4, 4.2.4.2, 4.2.4.5, 4.2.5.1, 4.2.5.3	Theoretical value without manufacturing, construction or maintenance tolerances.
Design track gauge/ Konstruktionsspurweite/ Ecartement de conception de la voie	5.3.3	A single value which is obtained when all the components of the track conform precisely to their design dimensions or their median design dimension when there is a range.
Distance between track centres/ Gleisabstand/ Entraxe de voies	4.2.3.2	The distance between points of the centre lines of the two tracks under consideration, measured parallel to the running surface of the reference track namely the less canted track.
Dynamic lateral force/	4.2.6.3	The sum of dynamic forces exerted by a wheelset on the track in lateral direction.




Defined term	UTP point	Definition
Dynamische Querkraft/ Effort dynamique transversal		
Earthworks/ Erdbauwerke/ Ouvrages en terre	4.2.7.2, 4.2.7.4	Soil structures and soil-retaining structures that are subject to railway traffic loading.
EN Line Category/ EN Streckenklasse/ EN Catégorie de ligne	4.2.7.4, Appendix E	The result of the classification process set out in EN 15528:201508+A1:2012 Annex A and referred to in that standard as 'Line Category'. It represents the ability of the infrastructure to withstand the vertical loads imposed by vehicles on the line or section of line for regular ("normal") service.
Equivalent conicity/ Äquivalente Konizität/ Conicité équivalente	4.2.4.5, 4.2.11.2	The tangent of the cone angle of a wheelset with coned wheels whose lateral movement has the same kinematic wavelength as the given wheelset on straight track and large-radius curves.
Fixed nose protection/ Leitweite/ Cote de protection de pointe	4.2.5.3, Appendix J	Dimension between the crossing nose and check rail (see dimension No 2 on Figure 14 below).
Flangeway depth/ Rillentiefe/ Profondeur d'ornière	4.2.8.6.	Dimension between the running surface and the bottom of flangeway (see dimension No 6 on Figure 14 below).
Flangeway width/ Rillenweite/ Largeur d'ornière	4.2.8.6.	Dimension between a running rail and an adjacent check or wing rail (see dimension No 5 on Figure 14 below).
Free wheel passage at check rail/wing rail entry/ Freier Raddurchlauf im Radlenker-Einlauf/Flügelschienen-Einlauf/ Côte d'équilibrage du contre-rail	4.2.8.6.	Dimension between the working face of the crossing check rail or wing rail and the gauge face of the running rail opposite across the gauge measured at entry to check rail or wing rail respectively. (see dimensions No 4 on Figure 14 below). The entry to the check rail or wing rail is the point at which the wheel is allowed to contact the check rail or wing rail.
Free wheel passage at crossing nose/ Freier Raddurchlauf im Bereich der Herzspitze/ Cote de libre passage dans le croisement	4.2.8.6.	Dimension between the working face of the crossing wing rail and check rail opposite across the gauge (see dimension No 3 on Figure 14 below).
Free wheel passage in switches/ Freier Raddurchlauf im Bereich der Zungen-vorrichtung/ Côte de libre passage de l'aiguillage	4.2.8.6.	Dimension from the gauge face of one switch rail to the back edge of the opposite switch rail (see dimension No 1 on Figure 14 below).
Gauge/ Begrenzungslinie/ Gabarit	4.2.1, 4.2.3.1	Set of rules including a reference contour and its associated calculation rules allowing definition of the outer dimensions of the vehicle and the space to be cleared by the infrastructure.



Defined term	UTP point	Definition
HBW/HBW/HBW	5.3.1.2	The non SI unit for steel hardness defined in EN ISO 6506-1:2005 Metallic materials — Brinell hardness test. Test method.
Height of check rail/ Radlenkerüberhöhung/ Surélévation du contre rail	4.2.8.6, Appendix J	Height of the check rail above the running surface (see dimension 7 on Figure 14 below).
Immediate Action Limit/Soforteingriffsschwelle/ Limite d'intervention immédiate	4.2.8, 4.5	The value which, if exceeded, requires taking measures to reduce the risk of derailment to an acceptable level.
Infrastructure Manager/ Betreiber der Infrastruktur/ Gestionnaire de l'Infrastructure	4.2.5.1, 4.2.8.3, 4.2.8.6, 4.2.11.2, 4.4, 4.5.2, 4.6, 4.7, 6.2.2.1, 6.2.4, 6.4	As defined in Article 2 letter k) of ATMF. [For EU: As defined in Article 2h) of Directive 2001/14/EC of 26 February 2001 on the allocation of railway infrastructure capacity and the levying of charges for the use of railway infrastructure and safety certification (OJ L 75, 15.3.2001, p. 29).]
In service value/ Wert im Betriebszustand/ Valeur en exploitation	4.2.8.5, 4.2.11.2	Value measured at any time after the infrastructure has been placed into service.
Intersection point (IP)/ Theoretischer Herzpunkt/ Point d'intersection théorique	4.2.8.6	Theoretical intersection point of the running edges at the centre of the crossing (see Figure 2).
Intervention Limit/ Eingriffsschwelle/ Valeur d'intervention	4.5.2	The value, which, if exceeded, requires corrective maintenance in order that the immediate action limit shall not be reached before the next inspection;
Isolated defect/ Einzelfehler/ Défaut isolé	4.2.8	A discrete track geometry fault.
Line speed/ Streckengeschwindigkeit/ Vitesse de la ligne	4.2.1	Maximum speed for which a line has been designed.
Maintenance file/ Instandhaltungsdossier/ Dossier de maintenance	4.5.1	Elements of the technical file relating to conditions and limits of use and instructions for maintenance.
Maintenance plan/ Instandhaltungsplan/ Plan de maintenance	4.5.2	A series of documents setting out the infrastructure maintenance procedures adopted by an Infrastructure Manager.
Multi-rail track/ Mehrschienengleis/ Voie à multi écartement	4.2.2.2	Track with more than two rails, where at least two pairs of respective rails are designed to be operated as separate single tracks, with or without different track gauges.
Nominal track gauge/ Nennspurweite/ Ecartement nominal de la voie	4.2.4.1	A single value which identifies the track gauge but may differ from the design track gauge.
Normal service/ Regelbetrieb/	4.2.2.2 4.2.9	The railway operating to a planned timetable service.




Defined term	UTP point	Definition
Service régulier		
Passive provision/ Vorsorge für künftige Erweiterungen/ Réservation pour extension future	4.2.9	Provision for the future construction of a physical extension to a structure (for example: increased platform length).
Performance Parameter/ Leistungskennwert/ Paramètre de performance	4.2.1	Parameter describing a UTP Category of Line used as the basis for the design of infrastructure subsystem elements and as the indication of the performance level of a line.
Plain line/ Freie Strecke/ Voie courante	4.2.4.5 4.2.4.6 4.2.4.7	Section of track without switches and crossings.
Point retraction/ Spitzenbeihoblung/ Dénivellation de la pointe de cœur	4.2.8.6	The reference line in a fixed common crossing can deviate from the theoretical reference line. From a certain distance to the crossing point, the reference line of the vee can, depending on the design, be retracted from this theoretical line away from the wheel flange in order to avoid contact between both elements. This situation is described in Figure 2.
Rail inclination/Schienenneigung/ Inclinaison du rail	4.2.4.5 4.2.4.7	An angle defining the inclination of the head of a rail when installed in the track relative to the plane of the rails (running surface), equal to the angle between the axis of symmetry of the rail (or of an equivalent symmetrical rail having the same rail head profile) and the perpendicular to the plane of the rails.
Rail pad/ Schienenzwischenlage/ Semelle sous rail	5.3.2	A resilient layer fitted between a rail and the supporting sleeper or baseplate.
Reverse curve/ Gegenbogen/ Courbes et contre-courbes	4.2.3.4	Two abutting curves of opposite flexure or hand
Structure gauge/ Lichtraum/ Gabarit des obstacles	4.2.3.1	Defines the space in relation to the reference track that shall be cleared of all objects or structures and of the traffic on the adjacent tracks, in order to allow safe operation on the reference track. It is defined on the basis of the reference contour by application of the associated rules.
Swing nose De Fr	4.2.5.2	-Within the domain of “common crossing with movable point”, the term “swing nose” identifies the part of the crossing which forms the vee and that it is moved to form a continuous running edge for either the main or the branch line.
Switch/ Zungenvorrichtung/ aiguillage	4.2.8.6	A unit of track comprising two fixed rails (stock rails) and two movable rails (switch rails) used to direct vehicles from one track to another track.
Switches and crossings/ Weichen und Kreuzungen/ Appareil de voie	4.2.4.5, 4.2.4.7, 4.2.5, 4.2.6, 4.2.8.6, 5.2, 6.2.4.4, 6.2.4.8,	Track constructed from sets of switches and individual crossings and the rails connecting them.


 OTIF	SUBSYSTEM INFRASTRUCTURE		Page 103 of 106
	INFRASTRUCTURE		
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN
			Date: 19.05.2020

Defined term	UTP point	Definition
	6.2.5.2, 7.3.3, Appendix C and D,	
Through route/ Stammgleis/ Voie directe	Appendix D	In the context of switches and crossings a route which perpetuate the general alignment of the track.
Track design De Fr	4.2.6, 6.2.5, Appendix C and D	The track design consists of cross-section defining basic dimensions and track components (for example rail, rail fastenings, sleepers, ballast) used together with operating conditions with an impact on forces related to 4.2.6-, such as axle load, speed and radius of horizontal curvature.
Track gauge/ Spurweite/ Ecartement de la voie	4.2.4.1, 4.2.4.5, 4.2.8.4, 5.3.3, 6.1.5.2, 6.2.4.3, Appendix H	The smallest distance between lines perpendicular to the running surface intersecting each rail head profile in a range from 0 to 14 mm below the running surface.
Track twist/ Gleisverwindung/ Gauche	4.2.7.1.6 4.2.8.3, 6.2.4.9,	Track twist is defined as the algebraic difference between two cross levels taken at a defined distance apart, usually expressed as a gradient between the two points at which the cross level is measured.
Train length/ Zuglänge/ Longueur du train	4.2.1	The length of a train, which can run on a certain line in normal operation.
Unguided length of an obtuse crossing/ Führungslose Stelle/ Lacune dans la traversée	4.2.5.3, Appendix J	Portion of obtuse crossing where there is no guidance of the wheel described as 'unguided distance' in EN 13232-3:2003.
Usable length of a platform/Bahnsteignutzlänge/ Longueur utile de quai	4.2.1, 4.2.9.1	The maximum continuous length of that part of platform in front of which a train is intended to remain stationary in normal operating conditions for passengers to board and alight from the train, making appropriate allowance for stopping tolerances. Normal operating conditions means that railway is operating in a non-degraded mode (e.g. rail adhesion is normal, signals are working, everything is working as planned).

Figure 14 Geometry of switches and crossings

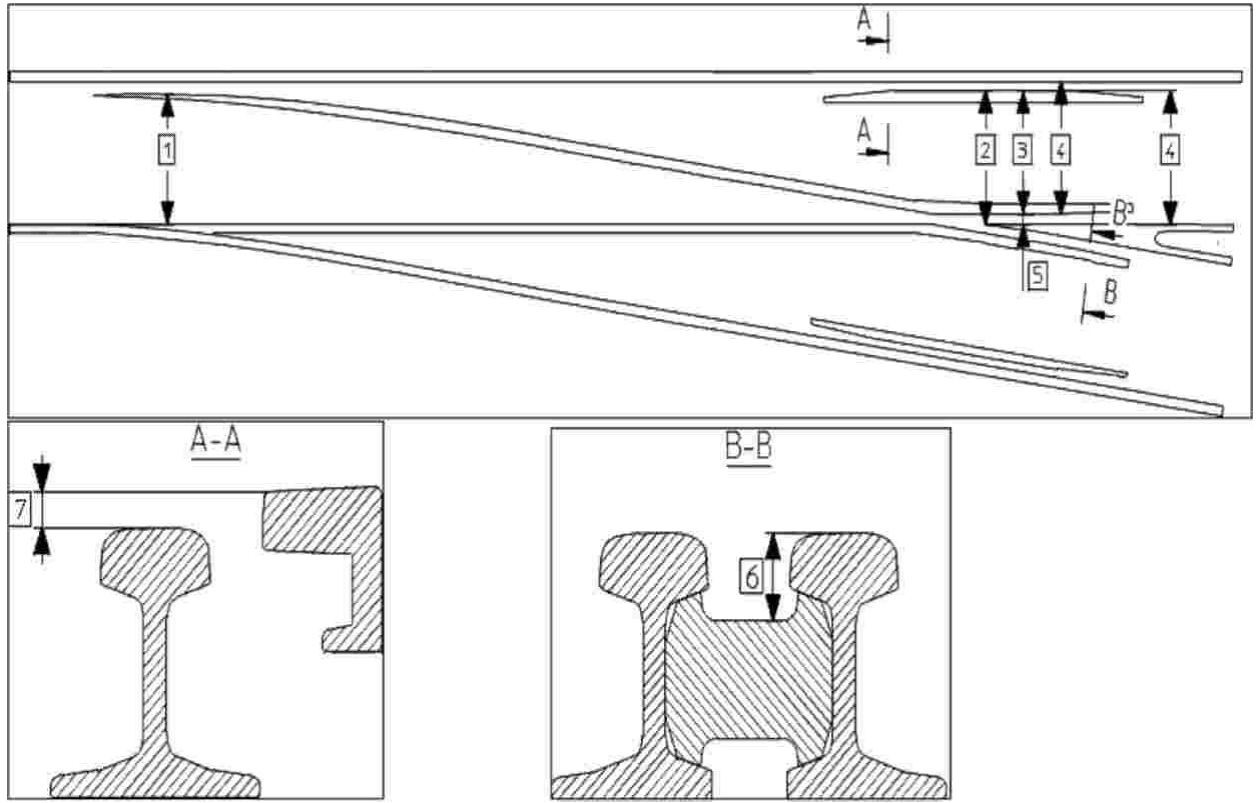

- (1) Free wheel passage in switches
- (2) Fixed nose protection
- (3) Free wheel passage at crossing nose
- (4) Free wheel passage at check rail/wing rail entry
- (5) Flangeway width
- (6) Flangeway depth
- (7) Height of check rail

 OTIF	SUBSYSTEM INFRASTRUCTURE			Page 105 of 106
	INFRASTRUCTURE			
Status: DRAFT	Version 1	Ref.: TECH-20021	Original: EN	Date: 19.05.2020

APPENDIX T

List of referenced standards

Table 49 List of referenced standards

Index No.	Reference	Document name	Version (year)	BP(s) concerned
1	EN 13674-1	Railway applications — Track — Rail Part 1: Vignole railway rails 46 kg/m and above	2011	Railhead profile for plain line (4.2.4.6), Assessment of rails (6.1.5.1)
2	EN 13674-4	Railway applications — Track — Rail — Part 4: Vignole railway rails from 27 kg/m to, but excluding 46 kg/m (with Amendment A1:2009)	2006	Railhead profile for plain line (4.2.4.6)
3	EN 13715	Railway applications — Wheelsets and bogies — Wheels — Wheels tread (with Amendment A1:2010)	2006 A1:2010	Equivalent conicity (4.2.4.5)
4	EN 13848-1	Track geometry quality — Part 1: Characterisation of track geometry (with Amendment A1:2008)	2003 A1:2008	The immediate action limit for track twist (4.2.8.3), Assessment of minimum value of mean track gauge (6.2.4.5)
5	EN 13848-5	Railway applications — Track — Track geometry quality — Part 5: Geometric quality levels — Plain line (with Amendment A1:2010)	2008	The immediate action limit for alignment (4.2.8.1), The immediate action limit for longitudinal level (4.2.8.2), The immediate action limit for track twist (4.2.8.3)
6	EN 14067-5	Railway applications — Aerodynamics — Part 5: Requirements and test procedures for aerodynamics in tunnels (with Amendment A1:2010)	2006	Assessment of maximum pressure variations in tunnels (6.2.4.12)
7	EN 15273-3	Railway applications — Gauges — Part 3: Structure gauges	2013	Structure gauge (4.2.3.1), Distance between track centres (4.2.3.2), Platform offset (4.2.9.3), Assessment of structure gauge (6.2.4.1), Assessment of distance between track centres (6.2.4.2), Assessment of platform offset (6.2.4.11)
8	EN 15302	Railway applications — Method for specifying the equivalent conicity (with Amendment A1:2010)	2008	Equivalent conicity (4.2.4.5), Assessment of design values for equivalent conicity (6.2.4.6)
9	EN 15528	Railway applications — Line categories for managing the interface between load limits of vehicles and infrastructure (with Amendment A1:2012)	2015 08	Ascertain compatibility of infrastructure and rolling stock after authorisation of rolling stock (7.6) , Capability requirements for structures according to traffic code (Appendix E), Basis of minimum requirements for structures for



Status: **DRAFT**

Version 1

Ref.: TECH-20021

Original: EN

Date: 19.05.2020

Index No.	Reference	Document name	Version (year)	BP(s) concerned
				passenger coaches and multiple units (Appendix K), Definition of line category a12 for traffic code p6 (Appendix L)
10	EN 15663	Railway applications — Definition of vehicle reference masses (with Corrections AC:2010)	2009	UTP categories of line (4.2.1), Basis of minimum requirements for structures for passenger coaches and multiple units (Appendix K)
11	EN 1990	Eurocode — Basis of structural design (with Amendment A1:2005 and Correction AC:2010)	2002	Structures resistance to traffic loads (4.2.7), Resistance of new bridges to traffic loads (4.2.7.1)
12	EN 1991-2	Eurocode 1 — Actions on structures — Part 2: Traffic load on bridges (with Correction AC:2010)	2003	Structures resistance to traffic loads (4.2.7), Resistance of new bridges to traffic loads (4.2.7.1), Equivalent vertical loading for new earthworks and earth pressure effects (4.2.7.2), Resistance of new structures over or adjacent to tracks (4.2.7.3)
13	EN 14363:2005	Railway applications — Testing for the acceptance of running characteristics of railway vehicles — Testing of running behaviour and stationary tests	2005	Track resistance to vertical load (4.2.6.1), Lateral track resistance (4.2.6.3),